


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Kogel Track 48V Adjustable 58 lx LED 1800-3000K WD DALI Black Structure




A spotlight with extremely flexible rotation, Kogel will leave you gasping in wonder. For starters, it uses a ball joint as a rotation mechanism. So yes, turning it all kinds of ways is possible. And no, the wires won't get all twisted inside. It just works and you'll love it on ceilings and walls. Designed by Odin and Jaap of Studio Kees, Kogel is truly a light that gives pleasure.

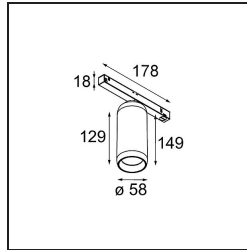

Specifications


| | |
|---------------------------------|---|
| Material | 13700532 |
| Light Source Type | LED |
| LED Type | BRIDGELUX WARMDIM 8W |
| LED technology | LED COB |
| CRI | Min. 95 |
| Colour Temperature | 1800-3000K (Warm Dim) |
| Lifetime | L90B10 @50,000 Hours |
| Number of Light Sources | 1 |
| CIE flux code | 96 99 99 100 67 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Input Voltage | 48Vdc |
| Luminaire power (W) | 8.6 |
| IP Rating | 20 |
| Dimming Protocol | DALI |
| DALI Standard | DALI-2 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Adjustability | H 360° V 50° |
| Primary Colour & Primary Finish | Black, Structure |
| Gross weight (g) | 880.0 |
| Luminous flux per lamp (lm) | 575 |
| Efficacy (lm/W) | 67 |
| Glare rating | 20 |
| Remark | <ul style="list-style-type: none"> • Magnetic reflector or lens not included. • This is not a complete product. Pista track 48V system required. • This is not a complete product. Pista track 48V system required. • For installations without dimmer, it is recommended to use 1-10 V luminaires. |

TM30 & CRI diagram

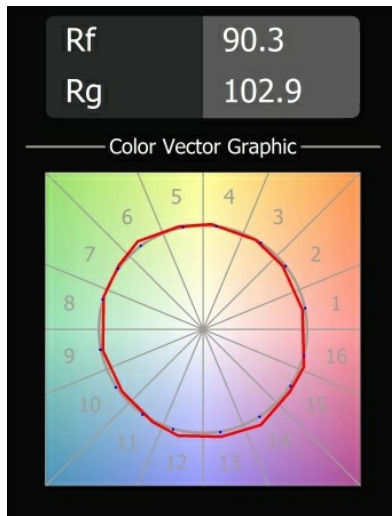



Optical Accessories

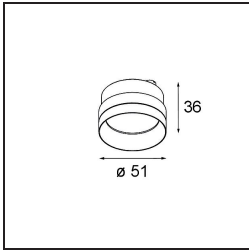

- ☐ **10222430** Reflector 51 Medium WD
- ☐ **10222530** Reflector 51 Flood WD

☐ Choose a required accessory