


Date
Customer
Project
Type

Semih Track 230V Adjustable 61 lx LED 1800-3000K WD Trailing Edge DI Black Structure




Semih is an award-winning downlighter with functional positive energy. Inspired by the yin-yang symbol, a sinuous S-shaped line divides Semih in two equal, complementary parts: the hard, solid part mounted to the ceiling and the soft, flexible part housing the light. Now available in two sizes.



Specifications

Material	13441932
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 12W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	95 100 100 100 91
Binning (SDCM)	3
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	15.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling
Adjustability	H 355° V -70/+70°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	760.0
Delivered lumens (lm)	928
Efficacy (lm/W)	61
Glare rating	20
Remark	<ul style="list-style-type: none"> • 3500K and 4000K on request • Magnetic reflector and lens not included • 3500K and 4000K on request • This is not a complete product. Magnetic reflector and track 230V system required. • This is not a complete product. Magnetic reflector and track 230V system required.

TM30 & CRI diagram

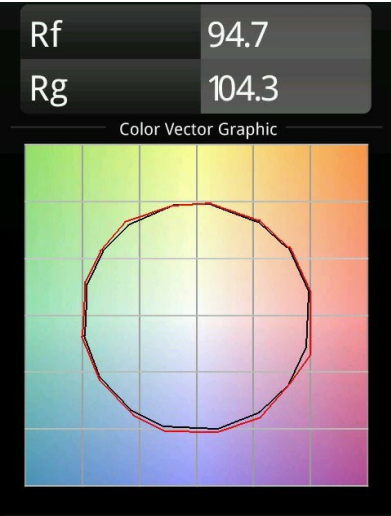



Optical Accessories

- **10218730** Reflector 57 Medium WD Aluminium Anodised
- **10219030** Reflector 57 Flood WD Gold Anodised
- **10218830** Reflector 57 Flood WD Aluminium Anodised
- **10219230** Reflector 57 Flood WD Champagne Anodised
- Choose a required accessory