



Date

Customer

Project

Type

FFD\_SLD75 LEDLINE PRESET AT 50% LIGHT OUTPUT 4000K (3) dali/pushdim DI

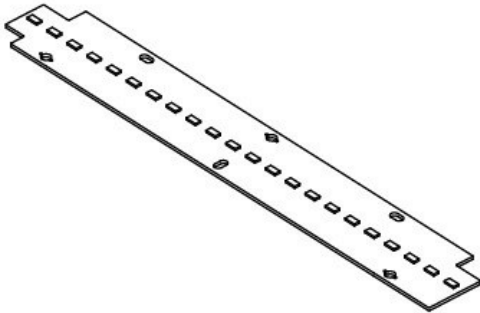

Specifications

|                         |                                    |
|-------------------------|------------------------------------|
| Material                | 98558603                           |
| Light Source Type       | LED                                |
| LED Type                | FORTIMO LEDLINE CREE PRO9 J-SERIES |
| LED technology          | LED PCB                            |
| CRI                     | Min. 90                            |
| Colour Temperature      | 4000K                              |
| Number of Light Sources | 3                                  |
| Binning (SDCM)          | 3                                  |
| Light Direction         | Down                               |
| Input Voltage           | 230V                               |
| IP Rating               | 20                                 |
| Dimming Protocol        | DALI, Push-Dim                     |
| Indoor/Outdoor          | Indoor                             |
| Gross weight (g)        | 0.001                              |

Specifications

TM30 & CRI diagram

