MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

SLD50 LEDline 4x LED 3000K Wide Flood DALI/Push-Dim DI

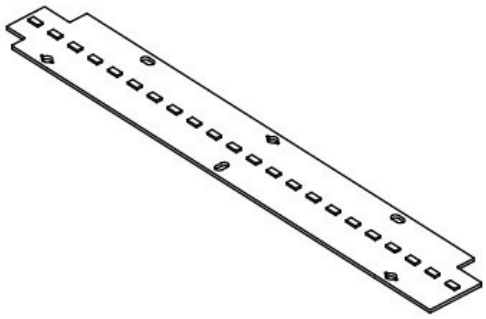



Specifications

Material	98561104
Light Source Type	LED
LED Type	FORTIMO LEDLINE CREE PRO9 J-SERIES
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	3000K
Number of Light Sources	4
Binning (SDCM)	3
Light Direction	Down
Input Voltage	230V
IP Rating	20
Dimming Protocol	DALI, Push-Dim
DALI Standard	DALI-2
Gross weight (g)	0.001

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2025-08-19, 05:54:03 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

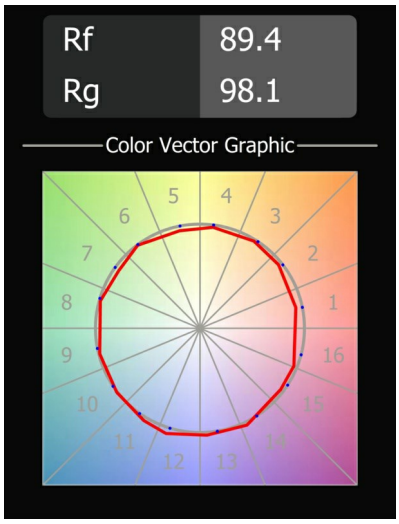

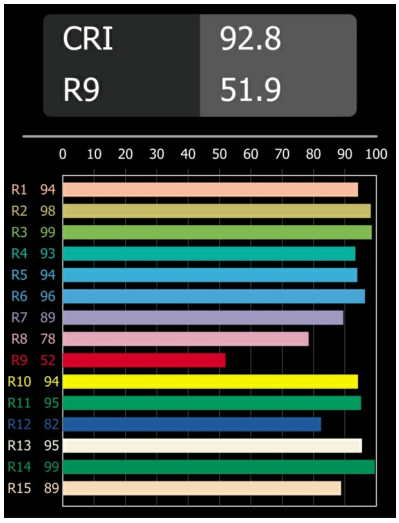

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2025-08-19, 05:54:03 PM - ©Modular Lighting Instruments