MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

SLD50 LEDline 4x LED 3000K Wide Flood DALI/Push-Dim DI

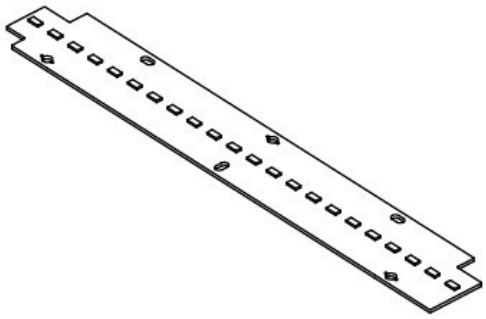



Specifications

Material	98561104
Light Source Type	LED
LED Type	FORTIMO LEDLINE CREE PRO9 J-SERIES
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	4
Binning (SDCM)	3
Light Direction	Down
Input Voltage	230V
Electrical Class	I
IP Rating	20
Dimming Protocol	DALI, Push-Dim
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Distance to Lighted Object (m)	0,1
Gross weight (g)	0.001

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-03-10, 05:35:56 PM - ©Modular Lighting Instruments
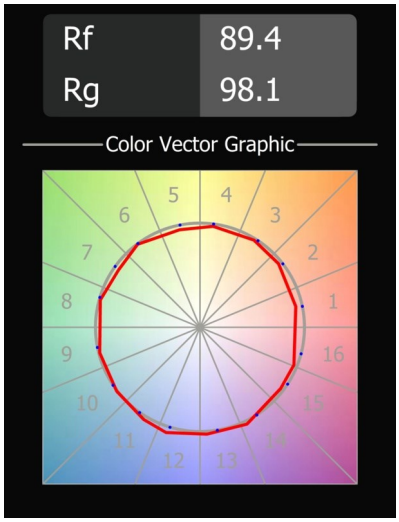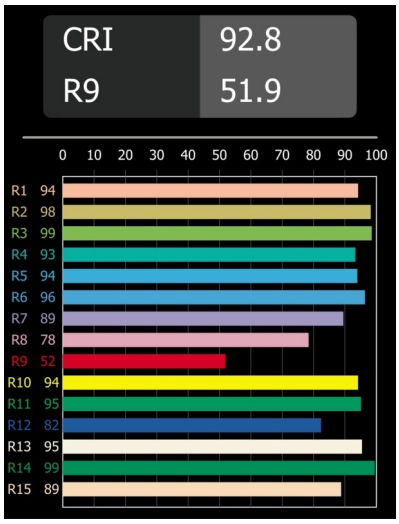
TM30 & CRI diagram