
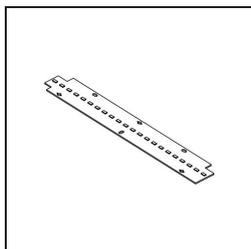


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

SLD50 High LEDline 4x LED 2700K Wide Flood DALI/Push-Dim DI

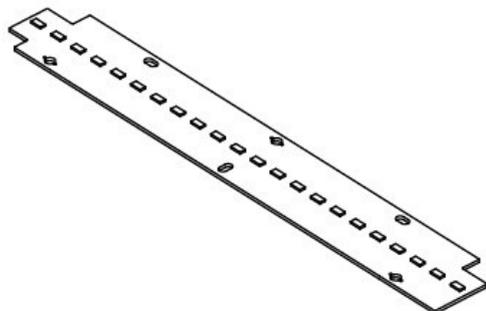

Specifications

| | |
|--------------------------------|------------------------------------|
| Material | 98591004 |
| Light Source Type | LED |
| LED Type | FORTIMO LEDLINE CREE PRO9 J-SERIES |
| LED technology | LED PCB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 4 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Input Voltage | 230V |
| Electrical Class | I |
| IP Rating | 20 |
| Dimming Protocol | DALI, Push-Dim |
| DALI Standard | DALI-2 |
| Indoor/Outdoor | Indoor |
| Distance to Lighted Object (m) | 0,1 |
| Gross weight (g) | 0.001 |

Specifications

TM30 & CRI diagram

