MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

SLD75 LEDline 7x LED 4000K Wide Flood Non-Dim DI

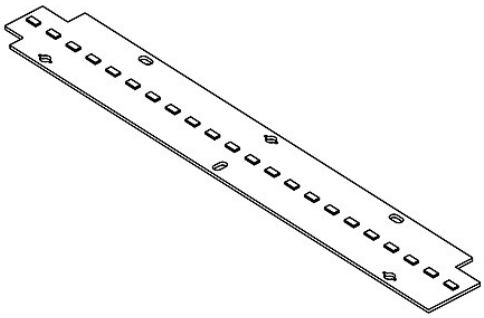



Specifications

Materiale	93554107
Tipo di Sorgente	LED
Tipologia LED	FORTIMO LEDLINE CREE PRO9 J-SERIES
Tecnologie LED	LED PCB
CRI	Min. 90
Temperatura di colore della luce	4000K
Vita utile	L80B10 @50.000 ore
Lampadina inclusa	Sì
Numero di fonte luminosa	7
Binning (SDCM)	3
Direzione della luce	Diretta
Volt in ingresso	230V
Classificazione elettrica	I
Grado IP	20
Protocollo di regolazione (Dimmer)	non dimmerabile
Interno/Esterno	Interno
Distanza dall'oggetto illuminato (m)	0,1
Peso lordo (g)	0,001

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-29, 01:29:41 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

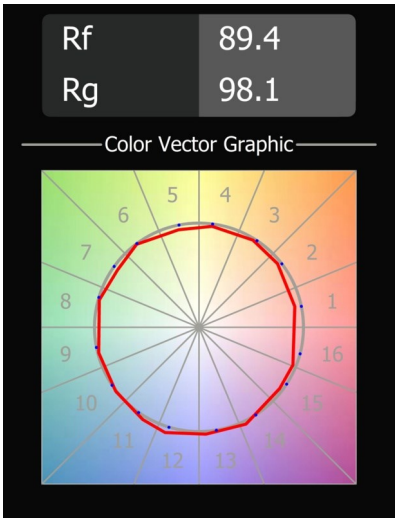

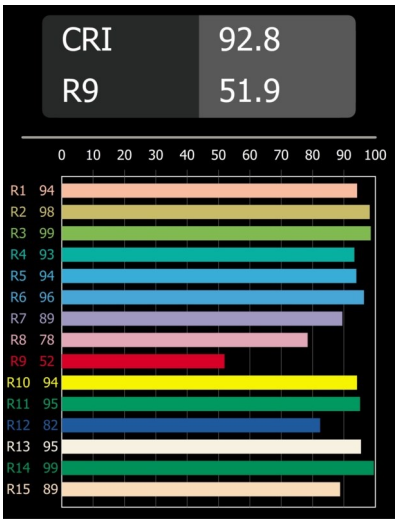

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-29, 01:29:41 PM - ©Modular Lighting Instruments