


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

Sulfer Wall Up/Down 2x IP54 LED 2700K Non-Dim DI Black Structure



Sulfer is a minimalistic square-shaped luminaire. The cast aluminium housing brings a modern accent to walls, whether they're in- or outside (IP54) homes, hotels, restaurants, and more. Sulfer diffuses a wide beam (flood), which can be customised by an additional beam angle plate (medium and small). A recessed light source and a diffuser ensure only indirect and soft light.




Specifications


|                                 |   |
|---------------------------------|---|
| Material                        | 13270332  |
| Light Source Type               | LED   |
| LED Type                        | LED LOWIE/LOWIEZE/SULFER  |
| LED technology                  | LED high power  |
| CRI                             | Min. 90   |
| Colour Temperature              | 2700K   |
| Lifetime                        | L80B20 @50,000 Hours  |
| Lamp Included                   | Yes   |
| Number of Light Sources         | 2   |
| CIE flux code                   | 98 99 100 50 98   |
| Binning (SDCM)                  | 3   |
| Light Direction                 | Up/Down   |
| Optic                           | Collimator  |
| Input Voltage                   | 230V  |
| Luminaire power (W)             | 8.5   |
| Electrical Class                | I   |
| IP Rating                       | 54  |
| Glow wire rating (°C)           | 960   |
| Dimming Protocol                | Non-Dim   |
| Indoor/Outdoor                  | Outdoor   |
| Application                     | Wall  |
| Mounting                        | Surface   |
| Adjustability                   | Not Applicable  |
| Distance to Lighted Object (m)  | 0,1   |
| Primary Colour & Primary Finish | Black, Structure  |
| Gross weight (g)                | 766.0   |
| Luminous flux per lamp (lm)     | 370   |
| Efficacy (lm/W)                 | 44  |
| Glare rating                    | 13  |
| Remark                          | <ul style="list-style-type: none"> <li>Not suitable for installation ≤5km from the coast</li> </ul> |

Specifications


**TM30 & CRI diagram**

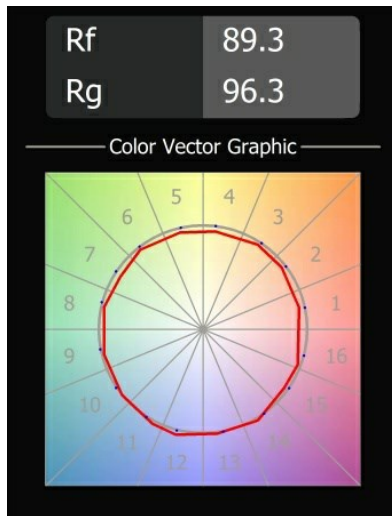

**Light distribution & beam diagram**

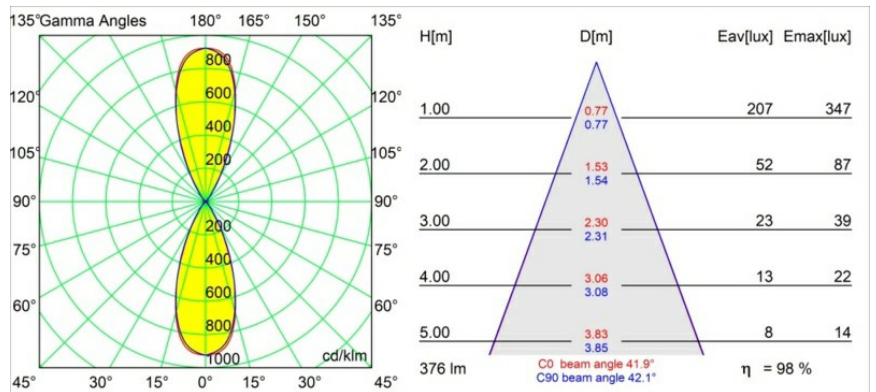


**Optical Accessories**



**13271209** Beam Aperture Plate IP54 Sulfer Spot White Structure

**13271232** Beam Aperture Plate IP54 Sulfer Spot Black Structure



**13271309** Beam Aperture Plate IP54 Sulfer Medium White Structure

**13271332** Beam Aperture Plate IP54 Sulfer Medium Black Structure

Choose a required accessory