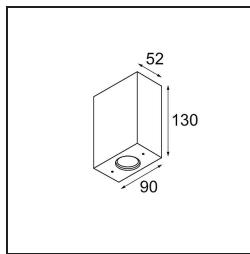
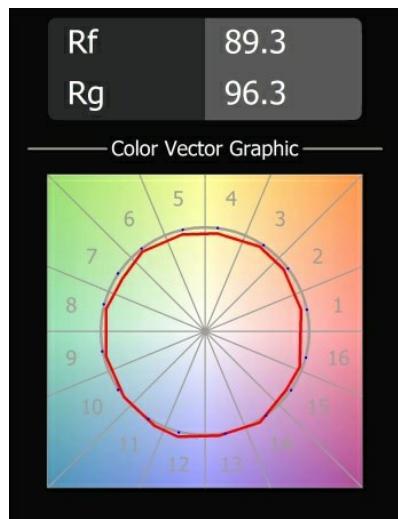
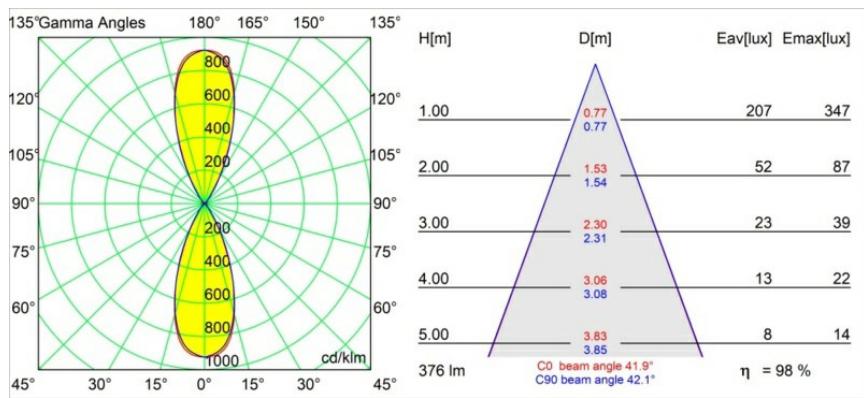


Sulfer Wall Up/Down 2x IP54 LED 2700K Non-Dim DI Black Structure



Sulfer is a minimalist square-shaped luminaire. The cast aluminium housing brings a modern accent to walls, whether they're in- or outside (IP54) homes, hotels, restaurants, and more. Sulfer diffuses a wide beam (flood), which can be customised by an additional beam angle plate (medium and small). A recessed light source and a diffuser ensure only indirect and soft light.


Specifications

Material	13270332
Light Source Type	LED
LED Type	LED LOWIE/LOWIEZE/SULFER
LED technology	LED high power
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
CIE flux code	98 99 100 50 98
Binning (SDCM)	3
Light Direction	Up/Down
Optic	Collimator
Input Voltage	230V
Luminaire power (W)	8.5
Electrical Class	I
IP Rating	54
Glow wire rating (°C)	960
Dimming Protocol	Non-Dim
Indoor/Outdoor	Outdoor
Application	Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	766.0
Luminous flux per lamp (lm)	370
Efficacy (lm/W)	44
Glare rating	13
Remark	• Not suitable for installation ≤5km from the coast


TM30 & CRI diagram

Light distribution & beam diagram

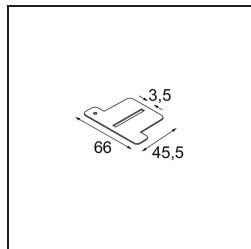
Optical Accessories



13271209 Beam Aperture Plate IP54 Sulfer Spot White Structure

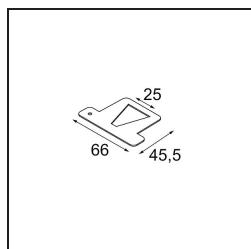13271232 Beam Aperture Plate IP54 Sulfer Spot Black Structure



13271309 Beam Aperture Plate IP54 Sulfer Medium White Structure

13271332 Beam Aperture Plate IP54 Sulfer Medium Black Structure

Choose a required accessory