


Date
Customer
Project
Type

Sulfer Wall Up/Down 2x IP54 LED 2700K Non-Dim DI Black Structure



Sulfer is a minimalistic square-shaped luminaire. The cast aluminium housing brings a modern accent to walls, whether they're in- or outside (IP54) homes, hotels, restaurants, and more. Sulfer diffuses a wide beam (flood), which can be customised by an additional beam angle plate (medium and small). A recessed light source and a diffuser ensure only indirect and soft light.





Specifications


Material	13270332
Light Source Type	LED
LED Type	LED LOWIE/LOWIEZE/SULFER
LED technology	LED high power
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
CIE flux code	98 99 100 50 98
Binning (SDCM)	3
Light Direction	Up/Down
Optic	Collimator
Input Voltage	230V
Luminaire power (W)	8.5
Electrical Class	I
IP Rating	54
Glow wire rating (°C)	960
Dimming Protocol	Non-Dim
Indoor/Outdoor	Outdoor
Application	Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	766.0
Delivered lumens (lm)	370
Efficacy (lm/W)	44
Glare rating	13
Remark	<ul style="list-style-type: none"> <li>Not suitable for installation ≤5km from the coast</li> </ul>

Specifications


**TM30 & CRI diagram**

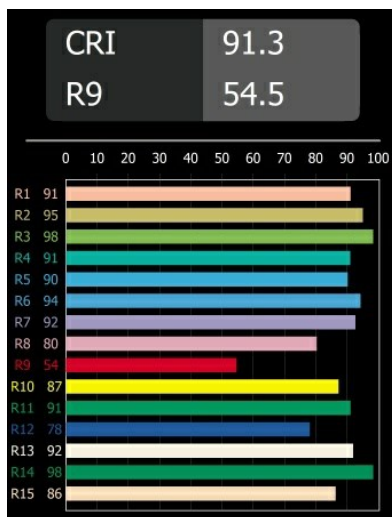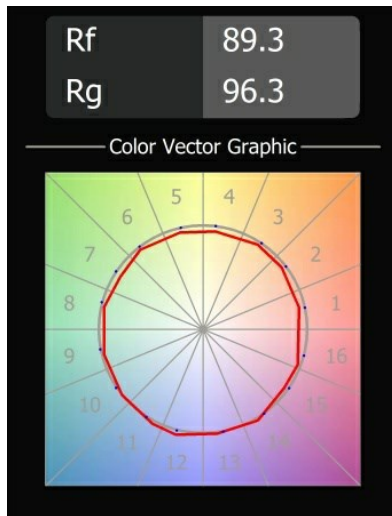


**Light distribution & beam diagram**

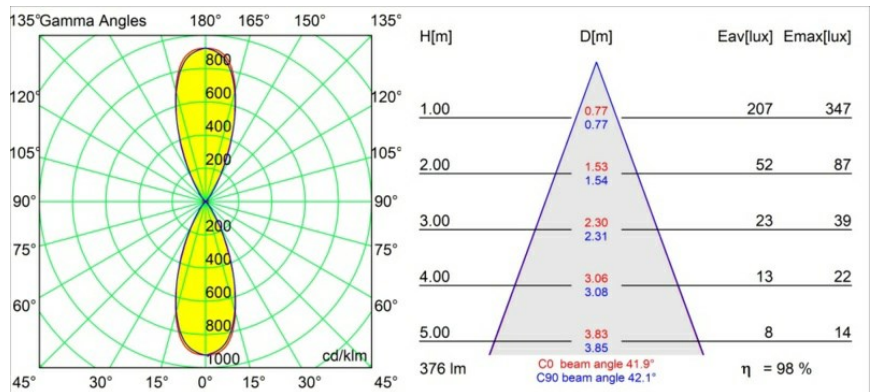

**Optical Accessories**



- 13271209** Beam Aperture Plate IP54 Sulfer Spot White Structure  
**13271232** Beam Aperture Plate IP54 Sulfer Spot Black Structure



- 13271309** Beam Aperture Plate IP54 Sulfer Medium White Structure  
**13271332** Beam Aperture Plate IP54 Sulfer Medium Black Structure

Choose a required accessory