MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Tetrix Straight Recessed 62 1x IP55 LED 3000K Spot DE Black Chrome

Jugamos con piezas, uniéndolas de formas complejas. Tetrix le invita a integrar su toque personal con diversas opciones de diseño y accesorios. Es versátil, se adapta a cualquier ubicación y la instalación es facilísima.



Specifications

Material	13730180	
Tipo de fuente de luz	LED	
Tipo de LED	CITIZEN CLU7A3	
Tecnología LED	COB LED	
CRI	Min. 90	
Temperatura del color	3000K	
Vida Util	L90B10 @50.000 horas	
Lámpara Incluida	Sí	
Número de fuentes de luz	1	
Código de flujo CIE	100 100 100 100 97	
Binning (SDCM)	2	
Dirección de la luz	Directo	
Óptica	Colimador	
Ángulo de Apertura medido (°)	16,0	
Voltaje de entrada	Driver de corriente constante requerido	
Clasificacion eléctrica	III	
Clasificación del IP	55	
Clasificación de hilo incandescente (°C)	850	
Interio/Exterior	Interior	
Aplicación	Techo, Pared	
Montaje	Empotrado	
Tamaño de corte (mm)	ø68 for Frame Recessed; ø89 for Frame Recessed TrimLess	
Profundidad de montaje (mm)	110,0	
Ajustabilidad	Not Applicable	
Distancia al objeto iluminado (m)	0,1	
Color principal & Acabado principal	Negro, Cromo	
Peso bruto (g)	146,0	
Corriente de accionamiento (mA)	350	500
Min. forward voltage (Vf)	11,2	11,2
Max. forward voltage (Vf)	13,2	13,2
Connected load (W)	4,1	6,1
Flujo luminoso por lámpara (lm)	419	563

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-06-10, 07:58:32 AM - ©Modular Lighting Instruments

Eficacia (lm/W)	102	92
Índice de deslumbramiento	5	6
Remark	• Tetrix Recessed Ring o Tube Surface no incluido • Este no es un producto completo. Se necesita un Tetrix Recessed Ring o Tube Surface. • Este no es un producto completo. Se necesita un Tetrix Recessed Ring o Tube Surface.	

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-06-10, 07:58:32 AM - ©Modular Lighting Instruments

TM30 & CRI diagram

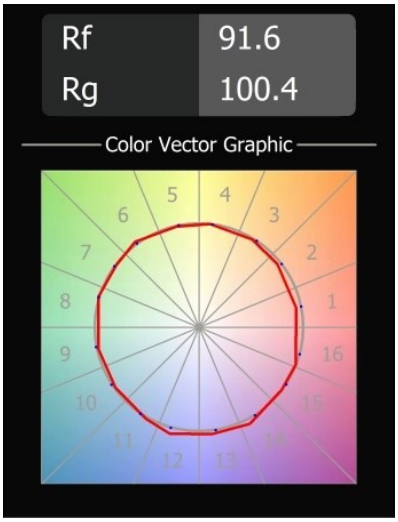

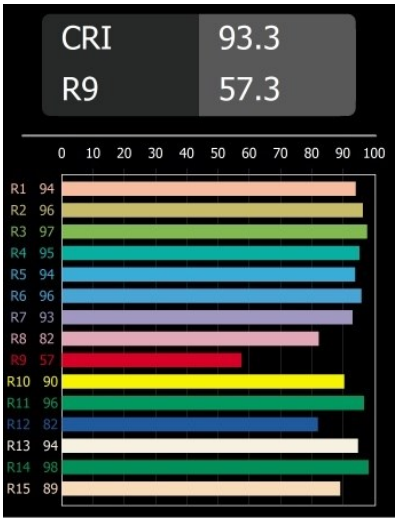

Light distribution & beam diagram

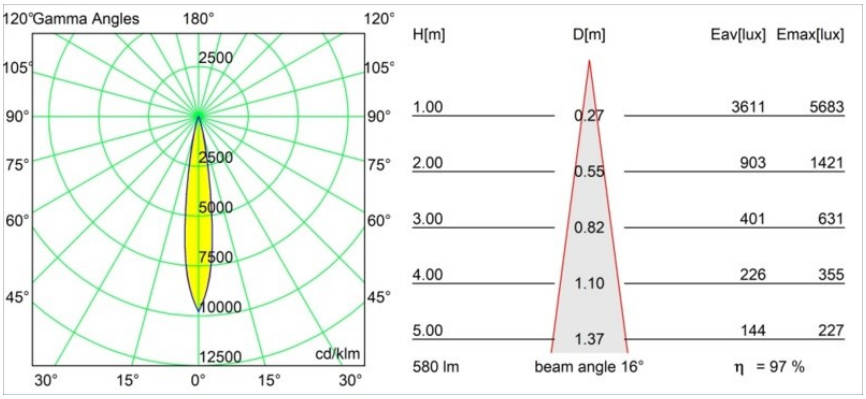

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-06-10, 07:58:32 AM - ©Modular Lighting Instruments

Accesorios Opticos



13515132 Honeycomb 33 Black Structure



13515038 Snoot 32 White Matt
13515032 Snoot 32 Black Structure



13515232 Light Cone 44 Black Structure
13515238 Light Cone 44 White Matt

Accesorios Instalación



13510083 Ring Recessed 62 1x IP55 Black Matt
13510038 Ring Recessed 62 1x IP55 White Matt



13515430 Ring Recessed Trimless 62 1x

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-06-10, 07:58:32 AM - ©Modular Lighting Instruments



13515530 Concrete Kit 62 150x150 1x



13515630 Concrete Ring 62 Standard Installation Housing



12293230 Plaster Kit Trimless 150x150 - 62 1x



11624030 Installation Housing 140x250x100x210



12292630 Gypsum Fibreboard 150x150

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-06-10, 07:58:32 AM - ©Modular Lighting Instruments