

Tetrix Pinhole Recessed 62 1x IP55 LED 4000K Spot DE White Matt



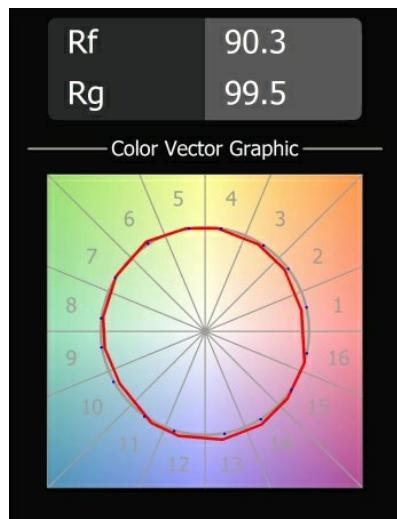
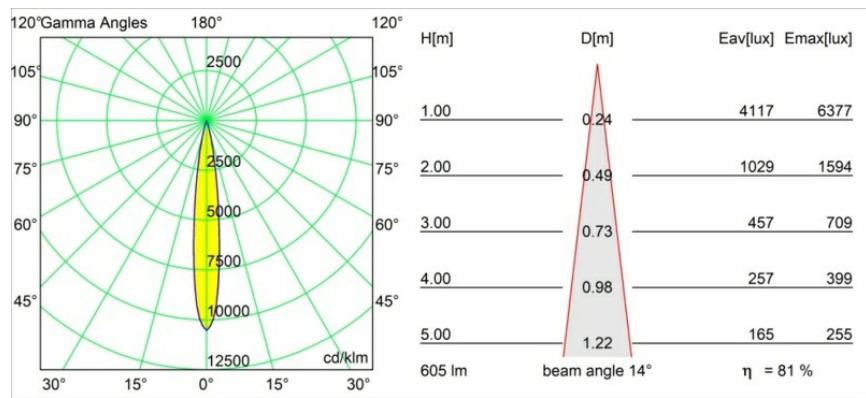
Specifications

Material	13734238	
Light Source Type	LED	
LED Type	CITIZEN CLU7A3	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	4000K	
Lifetime	L90B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	100 100 100 100 82	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Collimator	
Measured beam angle (°)	14.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	55	
Glow wire rating (°C)	850	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Recessed	
Cut-out size (mm)	Ø68 for Frame Recessed; Ø89 for Frame Recessed TrimLess	
Mounting depth (mm)	110.0	
Adjustability	Not Applicable	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	White, Matt	
Gross weight (g)	148.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	11,2	11,2
Max. forward voltage (Vf)	13,2	13,2
Connected load (W)	4,1	6,1
Luminous flux per lamp (lm)	367	494
Efficacy (lm/W)	90	81
Glare rating	1	1


A decisive light beam from a distinctive design. Tetrix Pinhole's wide rim adds a contrasting presence in black, or blends in nicely in white. Its deep-recessed light source minimises glare and makes small zones, coves or reading nooks even cosier. An IP55 rating makes Tetrix Pinhole ideal for wet and damp areas.



Remark

- Tetrix Recessed Ring or Tube Surface not included
- This is not a complete product. Tetrix Recessed Ring or Tube Surface required.
- This is not a complete product. Tetrix Recessed Ring or Tube Surface required.

TM30 & CRI diagram

Light distribution & beam diagram



Optical Accessories



13515038 Snoot 32 White Matt






13515032 Snoot 32 Black Structure

13515132 Honeycomb 33 Black Structure

13515232 Light Cone 44 Black Structure

13515238 Light Cone 44 White Matt

Installation Accessories


13510083 Ring Recessed 62 1x IP55 Black Matt

13510038 Ring Recessed 62 1x IP55 White Matt

13515430 Ring Recessed Trimless 62 1x


13515530 Concrete Kit 62 150x150 1x

13515630 Concrete Ring 62 Standard Installation Housing

12293230 Plaster Kit Trimless 150x150 - 62 1x

11624030 Installation Housing 140x250x100x210

12292630 Gypsum Fibreboard 150x150

Choose a required accessory