MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Tetrix Straight Recessed 62 1x IP55 LED 1800-3000K WD Medium DE Black Matt



Giocare con i vari pezzi, incastrarli nei modi più intricati. Tetrix ti invita a lasciare il tuo tocco personale con varie opzioni di design e accessori. È versatile, si adatta a qualsiasi luogo ed è facile da installare.

Specifications

Materiale	13740183
Tipo di Sorgente	LED
Tipologia LED	BRIDGELUX WARMDIM 8W
Tecnologie LED	COB
CRI	Min. 95
Temperatura di colore della luce	1800-3000K (Warm Dim)
Vita utile	L90B10 @50.000 ore
Lampadina inclusa	Sì
Numero di fonte luminosa	1
Codice di flusso CIE	99 100 100 100 82
Binning (SDCM)	3
Direzione della luce	Diretta
Ottiche	Collimatore
Fascio misurato (°)	30,0
Volt in ingresso	Necessario driver a corrente costante
Classificazione elettrica	III
Grado IP	55
Test filo a caldo (°C)	850
Interno/Esterno	Interno
Applicazione	Soffitto, Parete
Montaggio	Incassato
Foro d'incasso (mm)	ø68 for Frame Recessed; ø89 for Frame Recessed TrimLess
Profondità di montaggio (mm)	110,0
Orientabilità	Not Applicable
Distanza dall'oggetto illuminato (m)	0,1
Colore primario & Finitura primaria	Nero, Opaca
Peso lordo (g)	146,0
Corrente di azionamento (mA)	250
Min. forward voltage (Vf)	29,5
Max. forward voltage (Vf)	35,8
Connected load (W)	8,3
Flusso luminoso per lampade (lm)	544
Efficienza (lm/W)	66

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-17, 09:56:38 PM - ©Modular Lighting Instruments

Livello abbagliamento	16
Remark	• Tetrix Recessed Ring o Tube Surface non incluso • Questo non è un prodotto completo. È necessario un Tetrix Recessed Ring o Tube Surface. • Questo non è un prodotto completo. È necessario un Tetrix Recessed Ring o Tube Surface.

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-17, 09:56:38 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

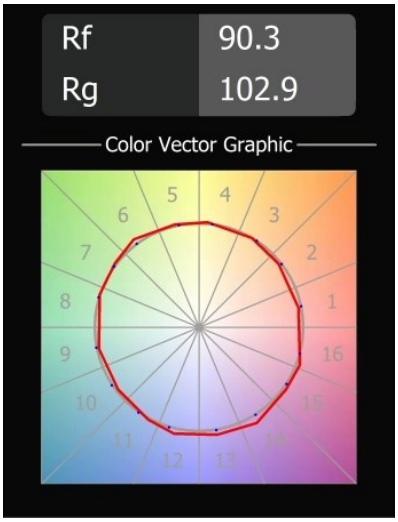

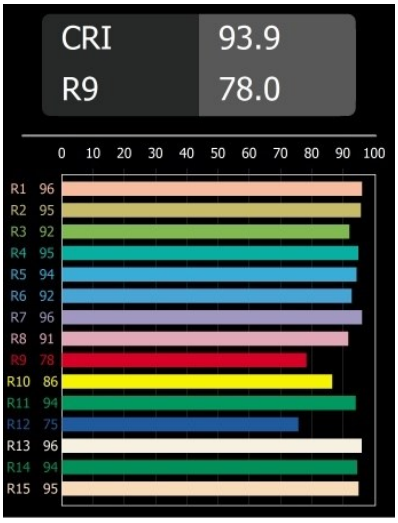

Light distribution & beam diagram

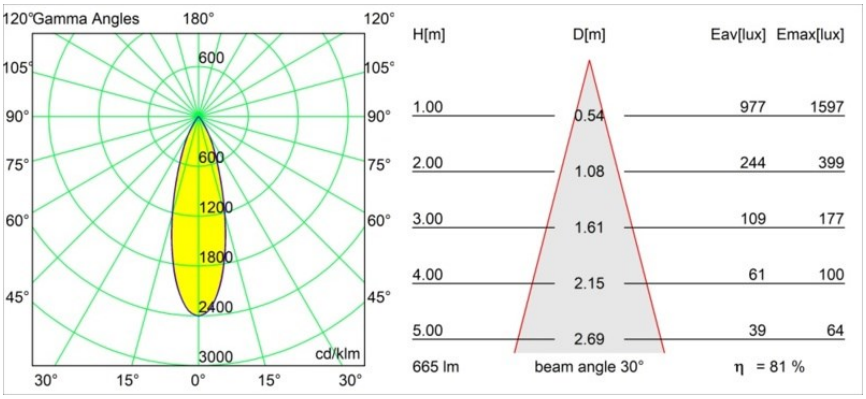

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-17, 09:56:38 PM - ©Modular Lighting Instruments

Accessorio Ottico



13515132 Honeycomb 33 Black Structure



13515038 Snoot 32 White Matt
13515032 Snoot 32 Black Structure



13515232 Light Cone 44 Black Structure
13515238 Light Cone 44 White Matt

Accessori Installazione



13510083 Ring Recessed 62 1x IP55 Black Matt
13510038 Ring Recessed 62 1x IP55 White Matt



13515430 Ring Recessed Trimless 62 1x

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-17, 09:56:38 PM - ©Modular Lighting Instruments



13515530 Concrete Kit 62 150x150 1x



13515630 Concrete Ring 62 Standard Installation Housing



12293230 Plaster Kit Trimless 150x150 - 62 1x



11624030 Installation Housing 140x250x100x210



12292630 Gypsum Fibreboard 150x150

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-17, 09:56:38 PM - ©Modular Lighting Instruments