


Date
Customer
Project
Type

Tetrix Pinhole Recessed 62 1x IP55 LED 1800-3000K WD Medium DE Black Matt

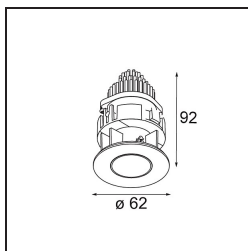

Specifications

Material	13744083
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 8W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 52
Binning (SDCM)	3
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	24.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	850
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø68 for Frame Recessed; ø89 for Frame Recessed TrimLess
Mounting depth (mm)	110.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Matt
Gross weight (g)	148.0
Drive current (mA)	250
Min. forward voltage (Vf)	29,5
Max. forward voltage (Vf)	35,8
Connected load (W)	8,3
Luminous flux per lamp (lm)	349
Efficacy (lm/W)	42
Glare rating	7


A decisive light beam from a distinctive design. Tetrix Pinhole's widish rim adds a contrasting presence in black, or blends in nicely in white. Its deep-recessed light source minimises glare and makes small zones, coves or reading nooks even cosier. An IP55 rating makes Tetrix Pinhole ideal for wet and damp areas.

Remark	<ul style="list-style-type: none">• Tetrix Recessed Ring or Tube Surface not included• This is not a complete product. Tetrix Recessed Ring or Tube Surface required.• This is not a complete product. Tetrix Recessed Ring or Tube Surface required.
--------	---

TM30 & CRI diagram



Light distribution & beam diagram

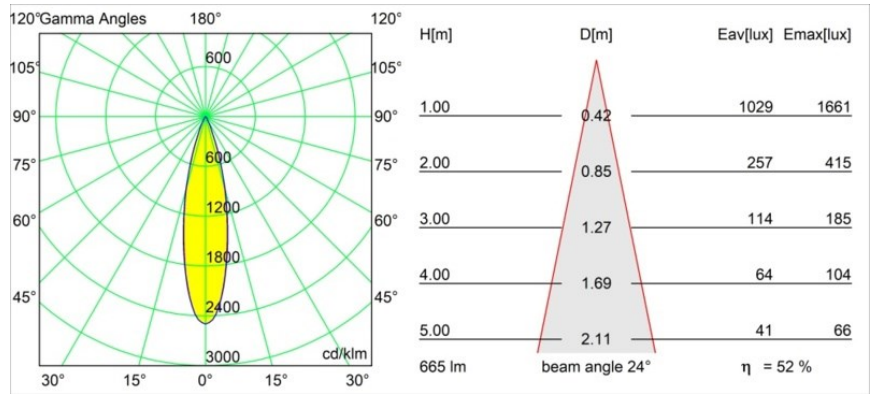

Diagrams

Optical Accessories



13515038 Snoot 32 White Matt
13515032 Snoot 32 Black Structure



13515132 Honeycomb 33 Black Structure



13515232 Light Cone 44 Black Structure
13515238 Light Cone 44 White Matt

Installation Accessories



13510083 Ring Recessed 62 1x IP55 Black Matt
13510038 Ring Recessed 62 1x IP55 White Matt




13515430 Ring Recessed Trimless 62 1x




13515530 Concrete Kit 62 150x150 1x




13515630 Concrete Ring 62 Standard Installation Housing

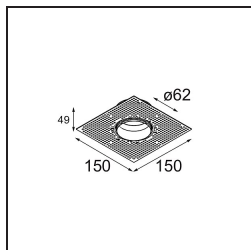

12293230 Plaster Kit Trimless 150x150 - 62 1x

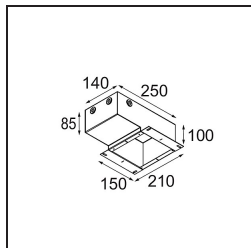

11624030 Installation Housing 140x250x100x210

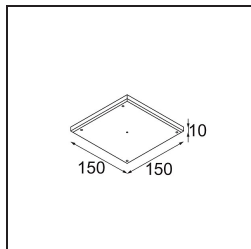

12292630 Gypsum Fibreboard 150x150

Choose a required accessory