MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Smart Lotis Recessed 82 1x IP55 LED 3000K Flood DE Bronze Brushed

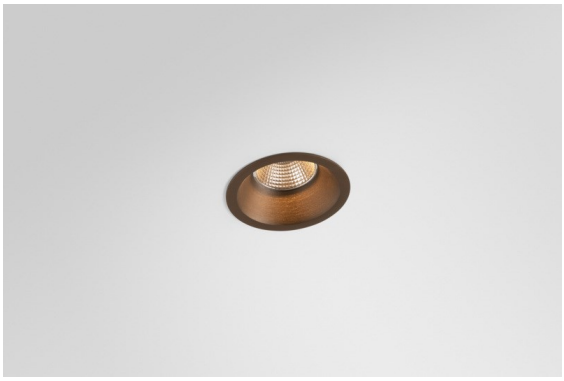



I 3 originali design Smart (Kup, Lotis e Cake) riescono ancora a rubare il cuore degli interior designer. E questo vale per tutta la famiglia Smart. L'accessibilità e l'estrema versatilità di Smart sono adatte a qualsiasi espressione. Mescola e abbina luci d'accento, up e downlight, fisse o regolabili, un mosaico di forme, dimensioni, colori e opzioni di montaggio e crea un'installazione giocosa.

Specifications

Materiale	12442414		
Tipo di Sorgente	LED		
Tipologia LED	BRIDGELUX V8G8		
Tecnologie LED	COB		
CRI	Min. 90		
Temperatura di colore della luce	3000K		
Vita utile	L80B10 @50.000 ore		
Lampadina inclusa	Sì		
Numero di fonte luminosa	1		
Codice di flusso CIE	98 100 100 100 86		
Binning (SDCM)	2		
Direzione della luce	Diretta		
Ottiche	Riflettore		
Fascio misurato (°)	38,0		
Volt in ingresso	Necessario driver a corrente costante		
Classificazione elettrica	III		
Grado IP	55		
Test filo a caldo (°C)	960		
Interno/Esterno	Interno		
Applicazione	Soffitto, Parete		
Montaggio	Incassato		
Foro d'incasso (mm)	ø70		
Profondità di montaggio (mm)	100,0		
Distanza dall'oggetto illuminato (m)	0,1		
Colore primario & Finitura primaria	Bronzo, Spazzolata		
Peso lordo (g)	220,0		
Corrente di azionamento (mA)	350	500	700
Min. forward voltage (Vf)	13,2	13,7	14,2
Max. forward voltage (Vf)	15,0	15,4	16,0
Connected load (W)	5,0	7,2	10,6
Flusso luminoso per lampade (lm)	543	734	970
Efficienza (lm/W)	109	102	92
Livello abbagliamento	19	20	21

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-15, 07:59:50 PM - ©Modular Lighting Instruments

Remark	• 3500K su richiesta

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-15, 07:59:50 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

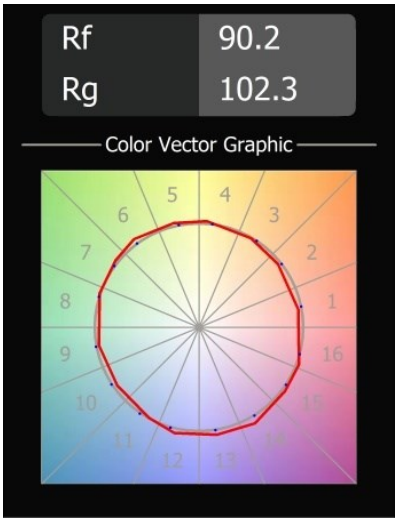

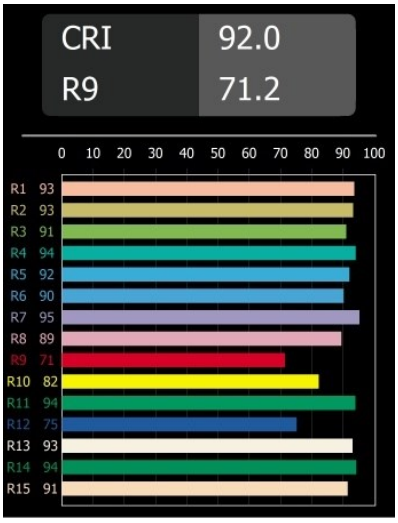

Light distribution & beam diagram

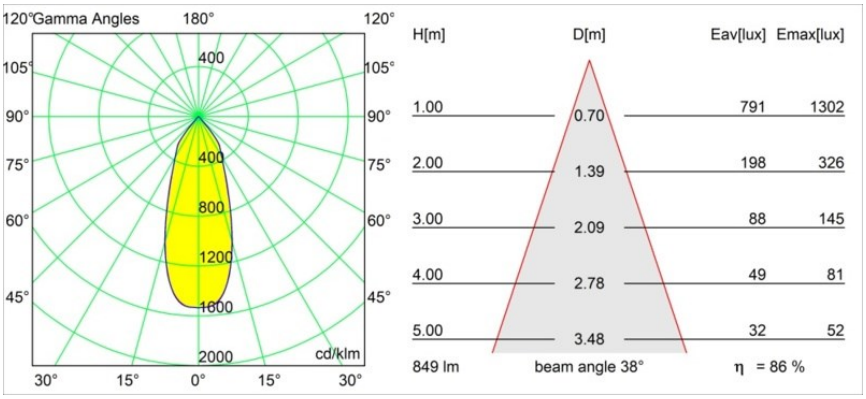

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-15, 07:59:50 PM - ©Modular Lighting Instruments

Accessori Decorativi



12500032 Mask Smart 82 1x Black Structure
12500009 Mask Smart 82 1x White Structure
12500046 Mask Smart 82 1x Gold Matt
12500015 Mask Smart 82 1x Champagne Brushed
12500014 Mask Smart 82 1x Bronze Brushed
12500043 Mask Smart 82 1x Black Brushed
12500016 Mask Smart 82 1x Silver Bronze Brushed



12500109 Mask Smart 82 2x White Structure
12500132 Mask Smart 82 2x Black Structure
12500146 Mask Smart 82 2x Gold Matt
12500114 Mask Smart 82 2x Bronze Brushed
12500116 Mask Smart 82 2x Silver Bronze Brushed
12500115 Mask Smart 82 2x Champagne Brushed
12500143 Mask Smart 82 2x Black Brushed

Accessori Installazione



12500230 Ring Recessed 82 1x



10889830 Installation Housing 192x190x130

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-15, 07:59:50 PM - ©Modular Lighting Instruments



12290130 Plaster Kit 190X190 - 70 1x



12291030 Plaster Kit 210x190 - 70 2x

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-15, 07:59:50 PM - ©Modular Lighting Instruments