


Date
Customer
Project
Type

Geometry Suspended Adjustable 672 1x LED 3000K DE White Structure - White Structure

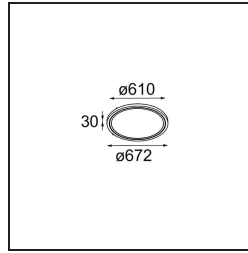


Specifications


Material	13750009
Light Source Type	LED
LED Type	GEOMETRY 24V LED DISC
LED technology	LED flexible PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Number of Light Sources	1
CIE flux code	47 79 95 100 100
Binning (SDCM)	3
Light Direction	Up, Down
Optic	Optic foil
Measured beam angle (°)	112.0
Input Voltage	24Vdc
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	650
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Suspended
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Secondary Colour & Secondary Finish	White, Structure
Gross weight (g)	13000.0
Delivered lumens (lm)	2317
Efficacy (lm/W)	110
Glare rating	20

Geometry is a pendant luminaire that offers general lighting. Its light panel can pivot 360° around an axis, hidden by a frame that's either circular or square. The beauty of this full rotation is that you can go from direct to indirect light in one single flip. A rectangular frame holding two panels will please those who long for twinning with light. Enjoy the impossible lightness of Geometry!


TM30 & CRI diagram

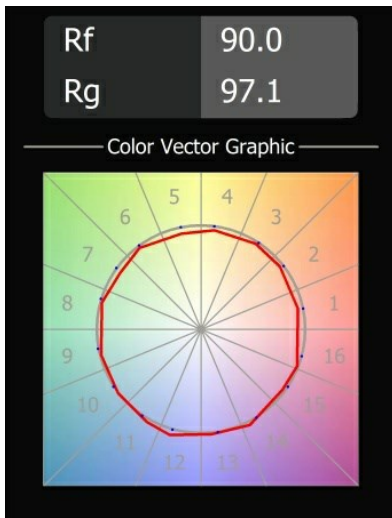


Light distribution & beam diagram

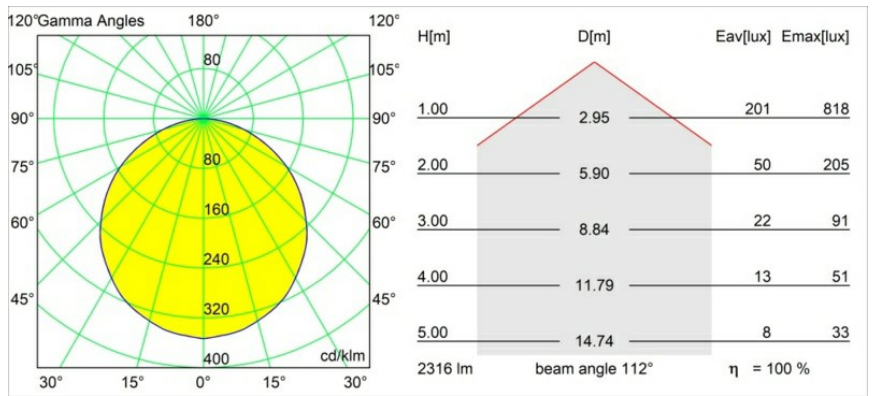


Installation Accessories

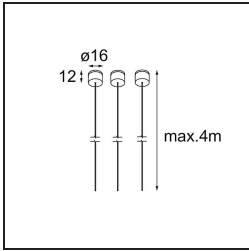


- **11060832** Suspension 4000 Geometry 672 (3) Black Structure
- **11060809** Suspension 4000 Geometry 672 (3) White Structure

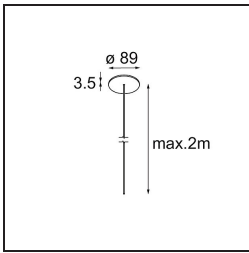


- **13720009** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 2000) White Structure
- **13720032** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 2000) Black Structure

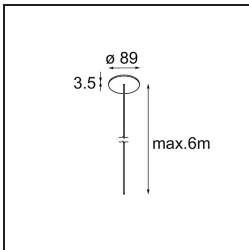


- **13720109** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 6000) White Structure
- **13720132** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 6000) Black Structure

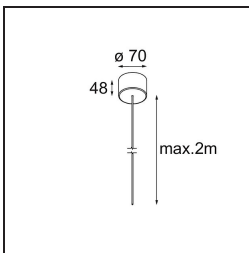


- **13720209** Power Feed Canopy Surface DE (Incl. Power Feed Cable 2000) White Structure
- **13720232** Power Feed Canopy Surface DE (Incl. Power Feed Cable 2000) Black Structure

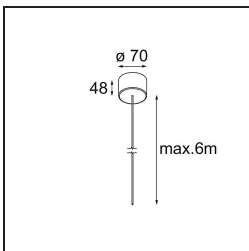

- **13720309** Power Feed Canopy Surface DE (Incl. Power Feed Cable 6000) White Structure
- **13720332** Power Feed Canopy Surface DE (Incl. Power Feed Cable 6000) Black Structure

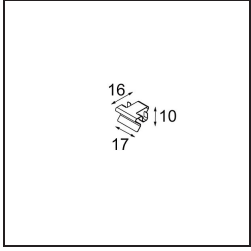

13750000 Connection Mechanical Geometry

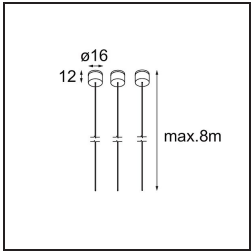

11060909 Suspension 8000 Geometry 672 (3) White Structure

11060932 Suspension 8000 Geometry 672 (3) Black Structure

Choose a required accessory