


Pate
Customer
Project
уре

Geometry Suspended Adjustable 672 1x LED 3000K DE White Structure - White Structure



Geometry is a pendant luminaire that offers general lighting. Its light panel can pivot 360° around an axis, hidden by a frame that's either circular or square. The beauty of this full rotation is that you can go from direct to indirect light in one single flip. A rectangular frame holding two panels will please those who long for twinning with light. Enjoy the impossible lightness of Geometry!





specifications	
Material	
1:110	

Light Source Type	Material	13750009
LED technology	Light Source Type	LED
CRI Min. 90 Colour Temperature 3000K Lifetime L80B10 @50,000 Hours Number of Light 1 Sources CIE flux code 47 79 95 100 100 Binning (SDCM) 3 Light Direction Up, Down Optic Optic foil Measured beam angle (°) Input Voltage 24Vdc Electrical Class III IP Rating 20 Glow wire rating (°C) 650 Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted Opject (m) Primary Colour & White, Structure Primary Finish Secondary Colour & Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (Im) Efficacy (Im/W) 110	LED Type	GEOMETRY 24V LED DISC
Colour Temperature 3000 K Lifetime L80B10 @50,000 Hours Number of Light 1 Sources CIE flux code 47 79 95 100 100 Binning (SDCM) 3 Light Direction Up, Down Optic Optic foil Measured beam angle (°) Input Voltage 24Vdc Electrical Class III IP Rating 20 Glow wire rating (°C) 650 Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted Opject (m) Primary Colour & White, Structure Primary Finish Secondary Colour & Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (Im) Efficacy (Im/W) 110	LED technology	LED flexible PCB
Lifetime L80B10 @50,000 Hours Number of Light Sources CIE flux code 47 79 95 100 100 Binning (SDCM) 3 Light Direction Up, Down Optic Optic foil Measured beam angle (°) Input Voltage 24Vdc Electrical Class III IP Rating 20 Glow wire rating (°C) 650 Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted O,1 Object (m) Primary Colour & Primary Finish Secondary Colour & Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (lm) Efficacy (Im/W) 110	CRI	Min. 90
Number of Light Sources CIE flux code 47 79 95 100 100 Binning (SDCM) 3 Light Direction Up, Down Optic Optic foil Measured beam angle (°) Input Voltage 24Vdc Electrical Class III IP Rating 20 Glow wire rating (°C) 650 Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted Object (m) Primary Colour & Primary Finish Secondary Colour & Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (lm) Efficacy (Im/W) 110	Colour Temperature	3000K
Sources CIE flux code 47 79 95 100 100 Binning (SDCM) 3 Light Direction Up, Down Optic Optic foil Measured beam angle (°) Input Voltage 24Vdc Electrical Class III IP Rating 20 Glow wire rating (°C) 650 Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted 0,1 Object (m) Primary Colour & White, Structure Primary Finish Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (Im) Efficacy (Im/W) 110	Lifetime	L80B10 @50,000 Hours
Binning (SDCM) Light Direction Optic Optic Optic foil Measured beam angle (°) Input Voltage Electrical Class III IP Rating 20 Glow wire rating (°C) Indoor/Outdoor Application Ceiling Mounting Suspended Distance to Lighted Object (m) Primary Colour & Primary Finish Secondary Colour & Secondary Finish Gross weight (g) Luminous flux per lamp (lm) Efficacy (Im/W) 110	9	1
Light Direction Up, Down Optic Optic foil Measured beam angle (°) Input Voltage 24Vdc Electrical Class III IP Rating 20 Glow wire rating (°C) 650 Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted Object (m) Primary Colour & White, Structure Primary Finish Secondary Colour & Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (Im) Efficacy (Im/W) 110	CIE flux code	47 79 95 100 100
Optic Optic foil Measured beam angle (°) Input Voltage 24Vdc Electrical Class III IP Rating 20 Glow wire rating (°C) 650 Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted O,1 Object (m) Primary Colour & White, Structure Primary Finish Secondary Colour & White, Structure Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (Im) Efficacy (Im/W) 110	Binning (SDCM)	3
Measured beam angle (°) Input Voltage 24Vdc Electrical Class III IP Rating 20 Glow wire rating (°C) Indoor/Outdoor Application Ceiling Mounting Suspended Distance to Lighted Object (m) Primary Colour & White, Structure Primary Finish Secondary Colour & White, Structure Gross weight (g) Luminous flux per lamp (Im) Efficacy (Im/W) 110	Light Direction	
Input Voltage	Optic	Optic foil
Electrical Class III IP Rating 20 Glow wire rating (°C) 650 Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted O,1 Object (m) Primary Colour & White, Structure Primary Finish Secondary Colour & Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (Im) Efficacy (Im/W) 110		112.0
IP Rating 20 Glow wire rating (°C) 650 Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted O,1 Object (m) Primary Colour & Primary Finish Secondary Colour & White, Structure Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (Im) Efficacy (Im/W) 110	Input Voltage	24Vdc
Glow wire rating (°C) 650 Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted O,1 Object (m) Primary Colour & White, Structure Primary Finish Secondary Colour & White, Structure Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (Im) Efficacy (Im/W) 110	Electrical Class	III
Indoor/Outdoor Indoor Application Ceiling Mounting Suspended Distance to Lighted 0,1 Object (m) Primary Colour & White, Structure Primary Finish Secondary Colour & Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (lm) Efficacy (lm/W) 110	IP Rating	20
Application Ceiling Mounting Suspended Distance to Lighted 0,1 Object (m) Primary Colour & White, Structure Primary Finish Secondary Colour & White, Structure Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (lm) Efficacy (lm/W) 110	Glow wire rating (°C)	650
Mounting Suspended Distance to Lighted 0,1 Object (m) Primary Colour & White, Structure Primary Finish Secondary Colour & Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (lm) Efficacy (lm/W) 110	Indoor/Outdoor	Indoor
Distance to Lighted Object (m) Primary Colour & White, Structure Primary Finish Secondary Colour & White, Structure Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (lm) Efficacy (lm/W) 110	Application	Ceiling
Object (m) Primary Colour & White, Structure Primary Finish Secondary Colour & Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (lm) Efficacy (lm/W) 110	Mounting	Suspended
Primary Finish Secondary Colour & White, Structure Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (lm) Efficacy (lm/W) 110	<u> </u>	0,1
Secondary Finish Gross weight (g) 13000.0 Luminous flux per lamp (lm) Efficacy (lm/W) 110		White, Structure
Luminous flux per lamp (lm) Efficacy (lm/W) 110		White, Structure
(Im) Efficacy (Im/W) 110	Gross weight (g)	13000.0
		2317
Clare rating 20	Efficacy (Im/W)	110
Glare rating 20	Glare rating	20




TM30 & CRI diagram






Light distribution & beam diagram

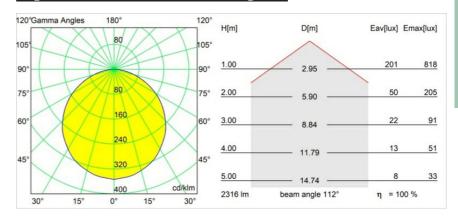





Installation Accessories




11060832 Suspension 4000 Geometry 672 (3) Black Structure **11060809** Suspension 4000 Geometry 672 (3) White Structure




13720009 Power Feed Canopy Recessed DE (Incl. Power Feed Cable 2000) White Structure
 13720032 Power Feed Canopy Recessed DE (Incl. Power Feed Cable 2000) Black Structure



13720109 Power Feed Canopy Recessed DE (Incl. Power Feed Cable 6000) White Structure
 13720132 Power Feed Canopy Recessed DE (Incl. Power Feed Cable 6000) Black Structure




13720209 Power Feed Canopy Surface DE (Incl. Power Feed Cable 2000) White Structure Power Feed Canopy Surface DE (Incl. Power Feed Cable 2000) Black Structure




13720309 Power Feed Canopy Surface DE (Incl. Power Feed Cable 6000) White Structure
 13720332 Power Feed Canopy Surface DE (Incl. Power Feed Cable 6000) Black Structure





13750000 Connection Mechanical Geometry



11060909 Suspension 8000 Geometry 672 (3) White Structure Suspension 8000 Geometry 672 (3) Black Structure

Choose a required accessory