


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Geometry Suspended Adjustable 672x672 1x LED 3000K DE White Structure - White Structure

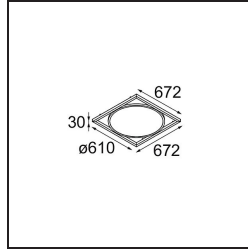


Specifications


| | |
|-------------------------------------|-----------------------|
| Material | 13750109 |
| Light Source Type | LED |
| LED Type | GEOMETRY 24V LED DISC |
| LED technology | LED flexible PCB |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L80B10 @50,000 Hours |
| Number of Light Sources | 1 |
| CIE flux code | 47 79 95 100 100 |
| Binning (SDCM) | 3 |
| Light Direction | Up, Down |
| Optic | Optic foil |
| Measured beam angle (°) | 112.0 |
| Input Voltage | 24Vdc |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 650 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Mounting | Suspended |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | White, Structure |
| Secondary Colour & Secondary Finish | White, Structure |
| Gross weight (g) | 13150.0 |
| Delivered lumens (lm) | 2317 |
| Efficacy (lm/W) | 110 |
| Glare rating | 20 |

Geometry is a pendant luminaire that offers general lighting. Its light panel can pivot 360° around an axis, hidden by a frame that's either circular or square. The beauty of this full rotation is that you can go from direct to indirect light in one single flip. A rectangular frame holding two panels will please those who long for twinning with light. Enjoy the impossible lightness of Geometry!

TM30 & CRI diagram

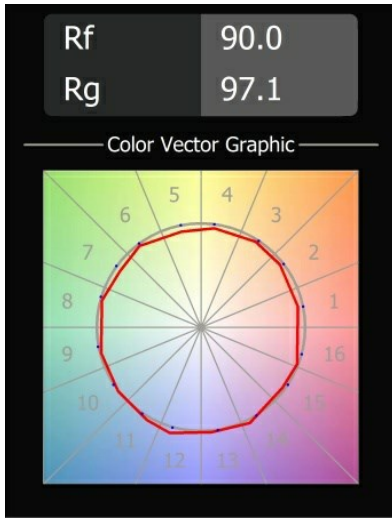


Light distribution & beam diagram

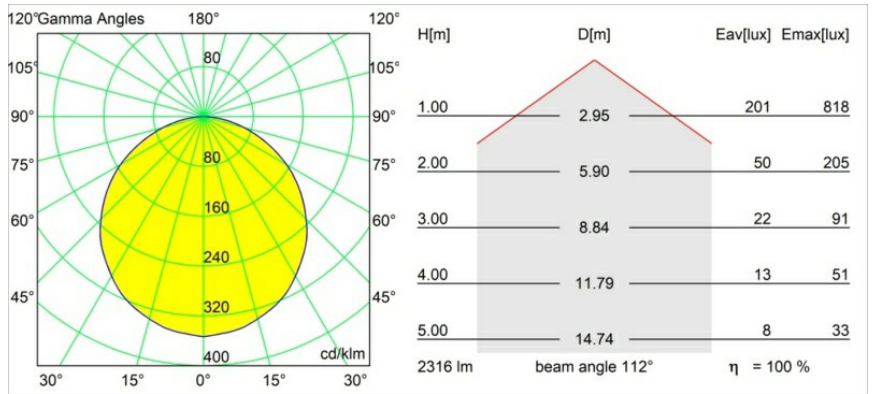


Diagrams


Installation Accessories

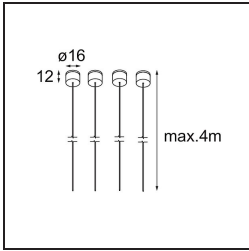


- **11061032** Suspension 4000 Geometry 672x672/672x1288 (4) Black Structure
- **11061009** Suspension 4000 Geometry 672x672/672x1288 (4) White Structure

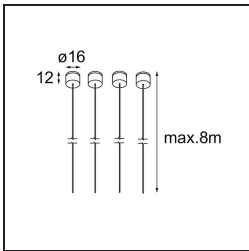


- **11061132** Suspension 8000 Geometry 672x672/672x1288 (4) Black Structure
- **11061109** Suspension 8000 Geometry 672x672/672x1288 (4) White Structure

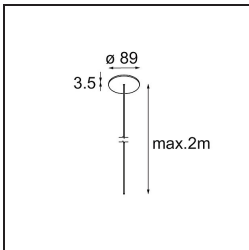


- **13720009** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 2000) White Structure
- **13720032** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 2000) Black Structure

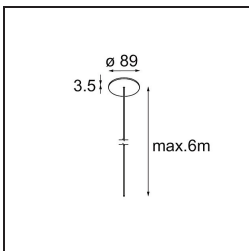


- **13720109** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 6000) White Structure
- **13720132** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 6000) Black Structure



- **13720209** Power Feed Canopy Surface DE (Incl. Power Feed Cable 2000) White Structure
- **13720232** Power Feed Canopy Surface DE (Incl. Power Feed Cable 2000) Black Structure

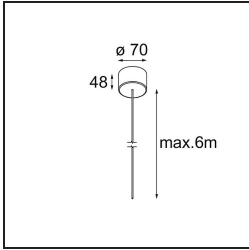

- **13720309** Power Feed Canopy Surface DE (Incl. Power Feed Cable 6000) White Structure
- **13720332** Power Feed Canopy Surface DE (Incl. Power Feed Cable 6000) Black Structure



- **13750000** Connection Mechanical Geometry

■ Choose a required accessory