


Date
Customer
Project
Type

*Geometry Suspended Adjustable 672x1288 2x LED 3000K DE Black Structure - Black Structure*

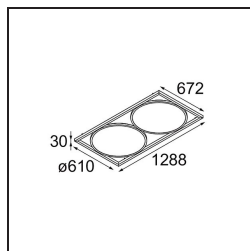


**Specifications**


Material	13750256
Light Source Type	LED
LED Type	GEOMETRY 24V LED DISC
LED technology	LED flexible PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Number of Light Sources	2
CIE flux code	47 78 95 100 100
Binning (SDCM)	3
Light Direction	Up, Down
Optic	Optic foil
Measured beam angle (°)	112.0
Input Voltage	24Vdc
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	650
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Suspended
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Secondary Colour & Secondary Finish	Black, Structure
Gross weight (g)	21100.0
Delivered lumens (lm)	2018
Efficacy (lm/W)	96
Glare rating	20

Geometry is a pendant luminaire that offers general lighting. Its light panel can pivot 360° around an axis, hidden by a frame that's either circular or square. The beauty of this full rotation is that you can go from direct to indirect light in one single flip. A rectangular frame holding two panels will please those who long for twinning with light. Enjoy the impossible lightness of Geometry!

**TM30 & CRI diagram**

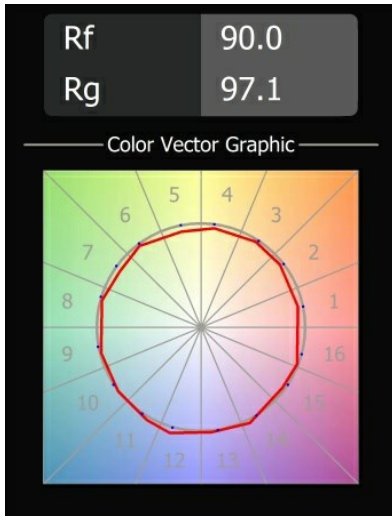


**Light distribution & beam diagram**

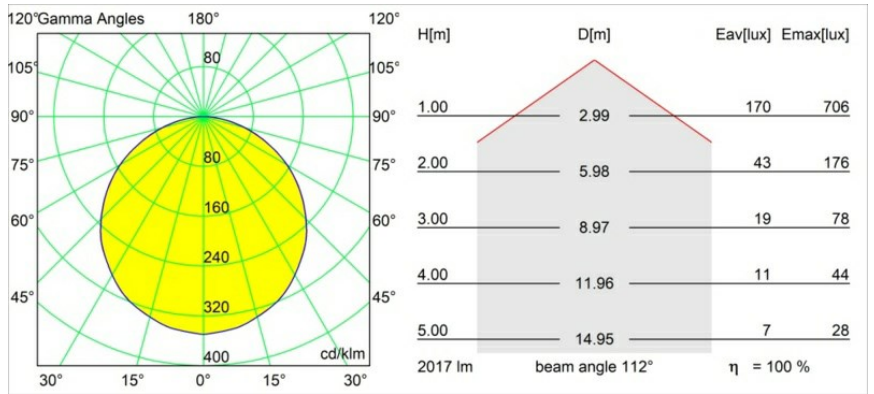


Diagrams


**Installation Accessories**

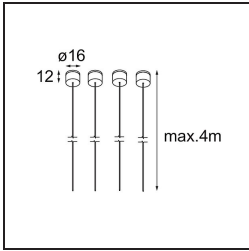


- **11061032** Suspension 4000 Geometry 672x672/672x1288 (4) Black Structure
- **11061009** Suspension 4000 Geometry 672x672/672x1288 (4) White Structure

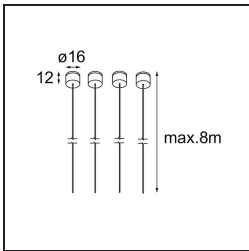


- **11061132** Suspension 8000 Geometry 672x672/672x1288 (4) Black Structure
- **11061109** Suspension 8000 Geometry 672x672/672x1288 (4) White Structure

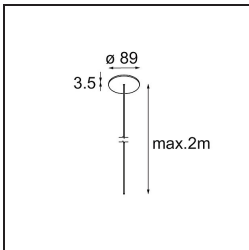


- **13720009** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 2000) White Structure
- **13720032** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 2000) Black Structure

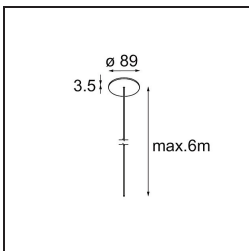


- **13720109** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 6000) White Structure
- **13720132** Power Feed Canopy Recessed DE (Incl. Power Feed Cable 6000) Black Structure



- **13720209** Power Feed Canopy Surface DE (Incl. Power Feed Cable 2000) White Structure
- **13720232** Power Feed Canopy Surface DE (Incl. Power Feed Cable 2000) Black Structure

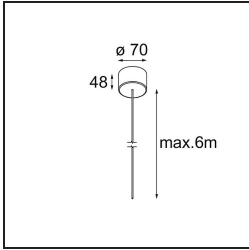

- **13720309** Power Feed Canopy Surface DE (Incl. Power Feed Cable 6000) White Structure
- **13720332** Power Feed Canopy Surface DE (Incl. Power Feed Cable 6000) Black Structure



- **13750000** Connection Mechanical Geometry

■ Choose a required accessory