


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

## *Nude Wall 70 1x LED PAR20 E27 2700K Medium Leading Edge/Trailing Edge Black Brushed Anodised*




Nude's pure geometrical lines are ideal for highlighting architectural features. A long, thin, wall luminaire with indirect light, it is completely stripped down to the essence of what constitutes a luminaire. Its light source is recessed in the slender cylinder so much so that it is practically invisible. Complement the light effect with white or black, or a row of rich colours.

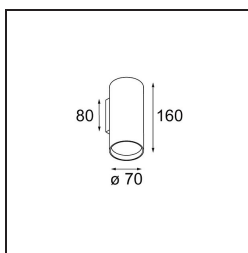

### Specifications

|                                 |                             |
|---------------------------------|-----------------------------|
| Material                        | 10922881                    |
| Light Source Type               | LED PAR20 E27               |
| LED Type                        | NUDE PH MAS LEDSP PAR20     |
| LED technology                  | LED high power              |
| CRI                             | Min. 90                     |
| Colour Temperature              | 2700K                       |
| Lifetime                        | L70B50 @25,000 Hours        |
| Lamp Included                   | Yes                         |
| Number of Light Sources         | 1                           |
| CIE flux code                   | 92 100 100 100 95           |
| Binning (SDCM)                  | 3                           |
| Light Direction                 | Up, Down                    |
| Optic                           | Collimator                  |
| Measured beam angle (°)         | 22.0                        |
| Input Voltage                   | 230V                        |
| Luminaire power (W)             | 6.0                         |
| Electrical Class                | I                           |
| IP Rating                       | 20                          |
| Dimming Protocol                | Leading Edge, Trailing Edge |
| Indoor/Outdoor                  | Indoor                      |
| Application                     | Wall                        |
| Mounting                        | Surface                     |
| Distance to Lighted Object (m)  | 0,1                         |
| Primary Colour & Primary Finish | Black, Brushed Anodised     |
| Gross weight (g)                | 544.0                       |
| Luminous flux per lamp (lm)     | 583                         |
| Efficacy (lm/W)                 | 97                          |
| Glare rating                    | 17                          |

### TM30 & CRI diagram

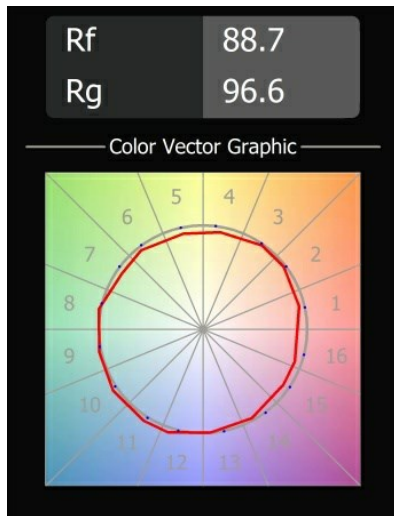

### Light distribution & beam diagram

