



Date
Customer
Project
Type

Thimble Recessed Adjustable 74 1x LED 2700K Spot DE Champagne Brushed Anodised

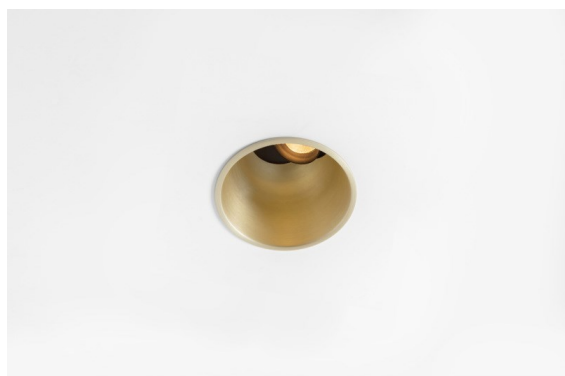


Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.




Specifications

Material	11621241	
Light Source Type	LED	
LED Type	CITIZEN CLU7A3	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L90B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	100 100 100 100 40	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Lens	
Measured beam angle (°)	16.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Recessed	
Cut-out size (mm)	70	
Mounting depth (mm)	110.0	
Adjustability	H 360° V 30°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Champagne, Brushed Anodised	
Gross weight (g)	240.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	11,2	11,2
Max. forward voltage (Vf)	13,2	13,2
Connected load (W)	4,1	6,1
Luminous flux per lamp (lm)	197	267
Efficacy (lm/W)	48	44
Glare rating	0	0


TM30 & CRI diagram

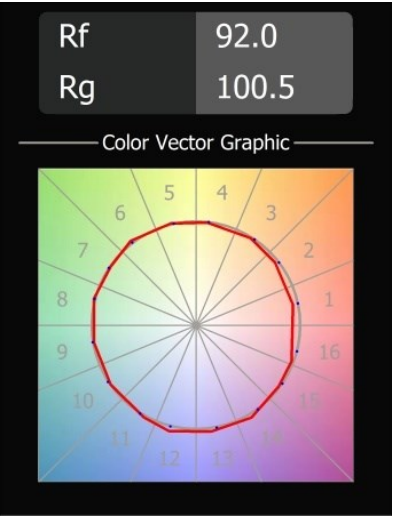


Light distribution & beam diagram

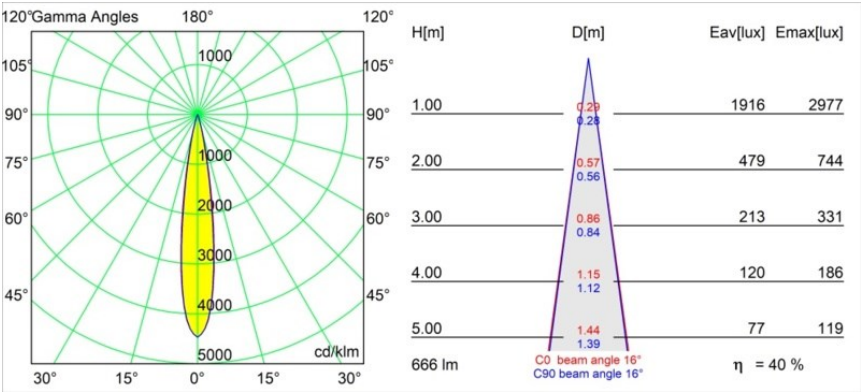


Installation Accessories




11624030 Installation Housing 140x250x100x210




12292630 Gypsum Fibreboard 150x150




11624430 Concrete Ring 70 Standard Installation Housing



11624330 Ring Recessed 70 1x



12292430 Plaster Kit Trimless 150x150 - 70 1x



11624230 Concrete Kit 70 150x150 1x

Choose a required accessory