MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Thimble Recessed Adjustable 74 1x LED 3000K Spot DE Champagne Brushed Anodised

Diseño minimalista, curvas sutiles, colores atrevidos, LED y lente de alta calidad. Con su fuente de luz sin brillos de empotrado profundo, el diseño limpio y perfecto de Thimble convierte este accesorio en una opción humilde pero sofisticada para cualquier entorno residencial de lujo o dedicado a la hospitalidad. Este foco downlight arquitectónico versátil y elegante ofrece pureza de forma, alta definición y luz de calidad sin acaparar toda la atención.



Specifications

Material	11621341	
Tipo de fuente de luz	LED	
Tipo de LED	CITIZEN CLU7A3	
Tecnología LED	COB LED	
CRI	Min. 90	
Temperatura del color	3000K	
Vida Util	L90B10 @50.000 horas	
Lámpara Incluida	Sí	
Número de fuentes de luz	1	
Código de flujo CIE	100 100 100 100 40	
Binning (SDCM)	2	
Dirección de la luz	Directo	
Óptica	Lente	
Ángulo de Apertura medido (°)	16,0	
Voltaje de entrada	Driver de corriente constante requerido	
Clasificacion eléctrica	III	
Clasificación del IP	20	
Clasificación de hilo incandescente (°C)	960	
Interio/Exterior	Interior	
Aplicación	Techo	
Montaje	Empotrado	
Tamaño de corte (mm)	70	
Profundidad de montaje (mm)	110,0	
Ajustabilidad	H 360° V 30°	
Distancia al objeto iluminado (m)	0,1	
Color principal & Acabado principal	Champán, Anodizado cepillado	
Peso bruto (g)	240,0	
Corriente de accionamiento (mA)	350	500
Min. forward voltage (Vf)	11,2	11,2
Max. forward voltage (Vf)	13,2	13,2
Connected load (W)	4,1	6,1
Flujo luminoso por lámpara (lm)	209	282
Eficacia (lm/W)	51	46

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-23, 12:29:02 PM - ©Modular Lighting Instruments

Índice de deslumbramiento	0	0

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-23, 12:29:02 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

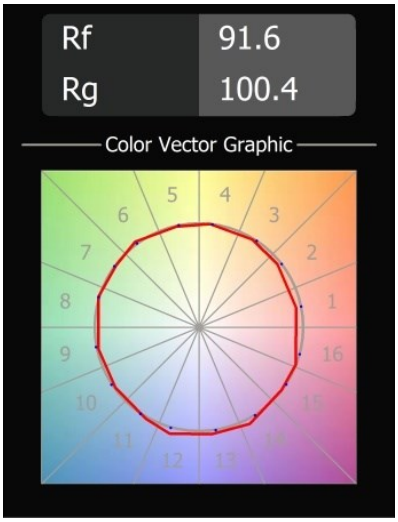

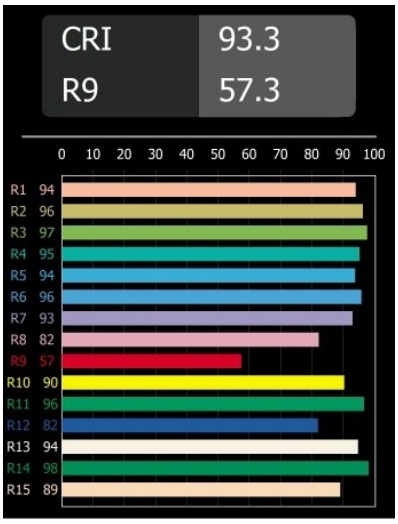

Light distribution & beam diagram

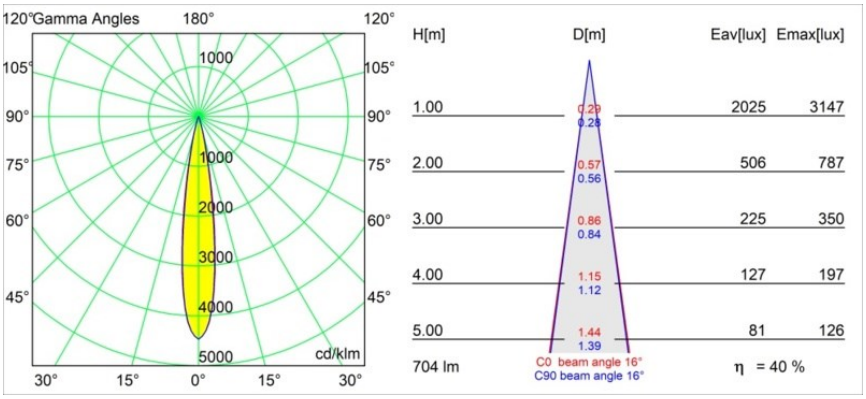

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-23, 12:29:02 PM - ©Modular Lighting Instruments

Accesorios Instalación



11624030 Installation Housing 140x250x100x210



12292630 Gypsum Fibreboard 150x150



11624430 Concrete Ring 70 Standard Installation Housing



11624330 Ring Recessed 70 1x



12292430 Plaster Kit Trimless 150x150 - 70 1x

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-23, 12:29:02 PM - ©Modular Lighting Instruments



11624230 Concrete Kit 70 150x150 1x

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-23, 12:29:02 PM - ©Modular Lighting Instruments