


Date
Customer
Project
Туре

### Thimble Recessed Trimless Adjustable 70 1x LED 2700K Spot DE Gold Brushed Anodised



Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.





# Specifications

Material	11623242		
Light Source Type	LED		
LED Type	CITIZEN CLU7A3		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L90B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	100 100 100 100 40		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Lens		
Measured beam angle (°)	16.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	20		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	ø111		
Mounting depth (mm)	110.0		
Adjustability	H 360° V 30°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Gold, Brushed Anodised		
Gross weight (g)	225.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	11,2	11,2	
Max. forward voltage (Vf)	13,2	13,2	
Connected load (W)	4,1	6,1	
Luminous flux per lamp (lm)	197	266	
Efficacy (Im/W)	48	44	
Glare rating	0	0	




## TM30 & CRI diagram






## Light distribution & beam diagram

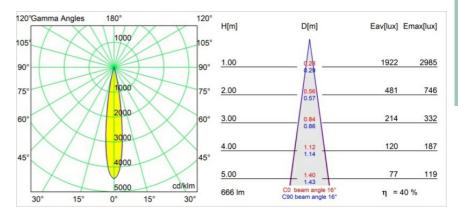





# Installation Accessories




**11624230** Concrete Kit 70 150x150 1x




**11624430** Concrete Ring 70 Standard Installation Housing



**11624030** Installation Housing 140x250x100x210




**12292630** Gypsum Fibreboard 150x150



**12293630** Plaster Kit Trimless 150x150 - 70 1x





11624730 Ring Recessed Trimless 70 1x

Choose a required accessory