
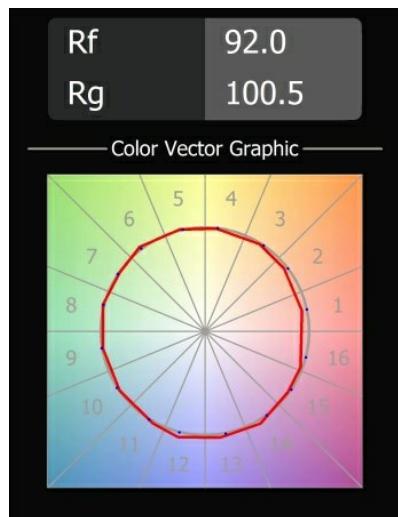
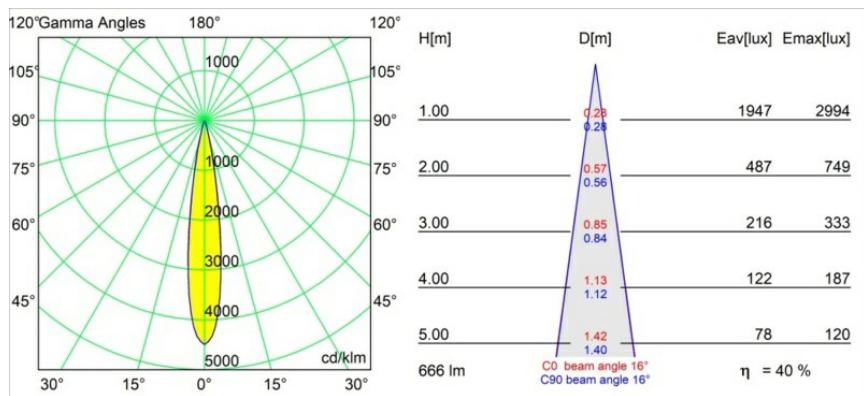







Thimble Recessed Trimless Adjustable 70 1x LED 2700K Spot DE Silver Bronze Brushed Anodised

Specifications

Material	11623284	
Light Source Type	LED	
LED Type	CITIZEN CLU7A3	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L90B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	100 100 100 100 41	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Lens	
Measured beam angle (°)	16.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Recessed	
Cut-out size (mm)	Ø111	
Mounting depth (mm)	110.0	
Adjustability	H 360° V 30°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Silver Bronze, Brushed Anodised	
Gross weight (g)	225.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	11,2	11,2
Max. forward voltage (Vf)	13,2	13,2
Connected load (W)	4,1	6,1
Luminous flux per lamp (lm)	200	271
Efficacy (lm/W)	49	44
Glare rating	0	0

TM30 & CRI diagram

Light distribution & beam diagram


Installation Accessories

11624230 Concrete Kit 70 150x150 1x

11624430 Concrete Ring 70 Standard Installation Housing

11624030 Installation Housing 140x250x100x210

12292630 Gypsum Fibreboard 150x150

12293630 Plaster Kit Trimless 150x150 - 70 1x



11624730 Ring Recessed Trimless 70 1x

Choose a required accessory