

| Date     |  |
|----------|--|
| Customer |  |
| Project  |  |
| Туре     |  |
|          |  |



Impulse Round Wall expresses a unique experience in your space, where bows of shadow and light create depth and accentuate architectural features all around.

| 25<br>145<br>80 | Friends of<br>hue |
|-----------------|-------------------|
| ecifications    |                   |
| terial          | 13770036          |


| Specifications                     |                       |
|------------------------------------|-----------------------|
| Material                           | 13770036              |
| Light Source Type                  | LED                   |
| LED Type                           | LED PCB IMPULSE       |
| LED technology                     | LED PCB               |
| CRI                                | Min. 90               |
| Colour Temperature                 | 2700K                 |
| Lifetime                           | L80B10 @50,000 Hours  |
| Lamp Included                      | Yes                   |
| Number of Light<br>Sources         | 1                     |
| CIE flux code                      | 3 18 47 8 90          |
| Binning (SDCM)                     | 3                     |
| Light Direction                    | Up, Down              |
| Measured beam angle (°)            | 120.0                 |
| Input Voltage                      | 230V                  |
| Luminaire power (W)                | 7.5                   |
| Electrical Class                   | I                     |
| IP Rating                          | 20                    |
| Glow wire rating (°C)              | 960                   |
| Dimming Protocol                   | Trailing Edge         |
| Indoor/Outdoor                     | Indoor                |
| Application                        | Wall                  |
| Mounting                           | Surface               |
| Adjustability                      | Not Applicable        |
| Distance to Lighted<br>Object (m)  | 0,1                   |
| Primary Colour &<br>Primary Finish | Grey White, Structure |
| Gross weight (g)                   | 963.0                 |
| Delivered lumens (Im)              | 569                   |
| Efficacy (Im/W)                    | 76                    |
| Glare rating                       | 26                    |
|                                    |                       |

## Impulse Round Wall 1x LED 2700K Trailing Edge DI Grey White Structure




## TM30 & CRI diagram





## Light distribution & beam diagram

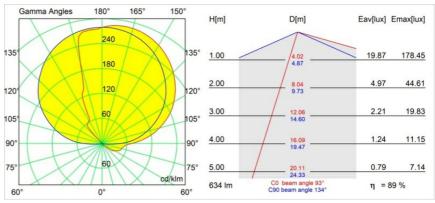

Diagrams