



Date
Customer
Project
Type

*Impulse Round Wall 1x IP44 LED 3000K DE Grey White Structure*

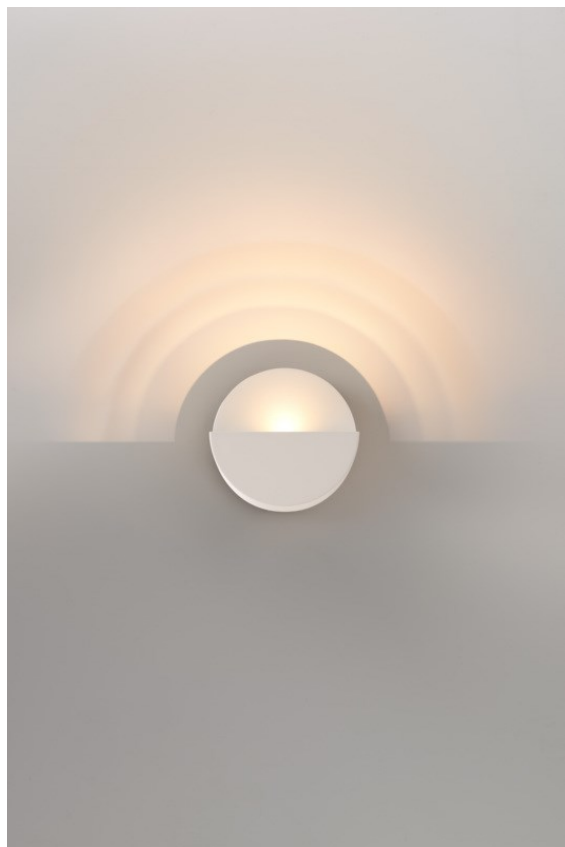

Impulse Round Wall expresses a unique experience in your space, where bows of shadow and light create depth and accentuate architectural features all around.

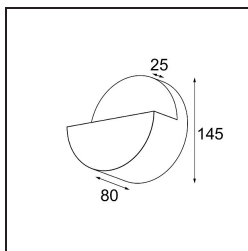


**Specifications**

Material	13770736
Light Source Type	LED
LED Type	LED PCB IMPULSE
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	3 18 47 8 90
Binning (SDCM)	3
Light Direction	Up, Down
Measured beam angle (°)	120.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	44
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Grey White, Structure
Gross weight (g)	880.0
Drive current (mA)	350      500
Min. forward voltage (Vf)	10.8      10.8
Max. forward voltage (Vf)	12.0      12.0
Connected load (W)	3.8      5.5
Luminous flux per lamp (lm)	458      630
Efficacy (lm/W)	120      115
Glare rating	26      27

**TM30 & CRI diagram**



**Light distribution & beam diagram**

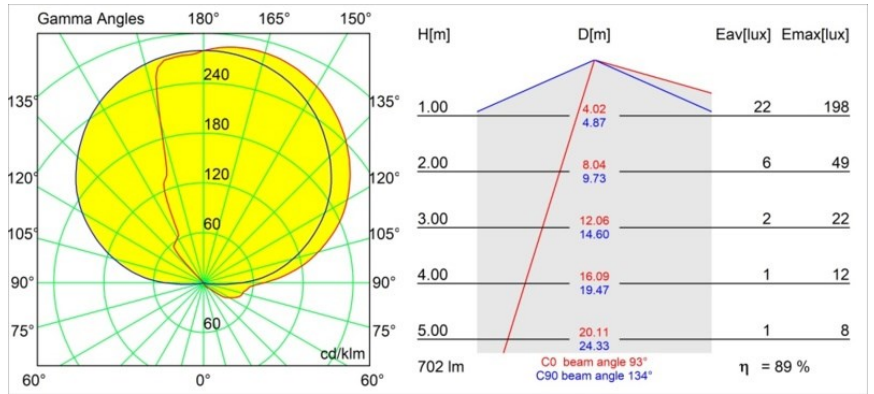

Diagrams