


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Impulse Square Wall 1x LED 3000K 1-10V DI Grey White Structure



An abstract square shape that transforms into a poem of light and shadow. Impulse Square Wall brings a surprising light effect to any surface it touches.

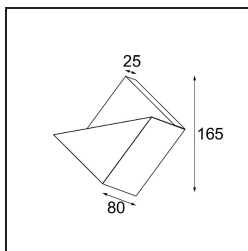


Specifications

| | |
|---------------------------------|-----------------------|
| Material | 13771336 |
| Light Source Type | LED |
| LED Type | LED PCB IMPULSE |
| LED technology | LED PCB |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 0 8 38 5 88 |
| Binning (SDCM) | 3 |
| Light Direction | Up, Down |
| Measured beam angle (°) | 120.0 |
| Input Voltage | 230V |
| Luminaire power (W) | 8.6 |
| Electrical Class | I |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | 1-10V |
| Indoor/Outdoor | Indoor |
| Application | Wall |
| Mounting | Surface |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Grey White, Structure |
| Gross weight (g) | 906.0 |
| Luminous flux per lamp (lm) | 621 |
| Efficacy (lm/W) | 72 |
| Glare rating | 27 |

TM30 & CRI diagram



Light distribution & beam diagram

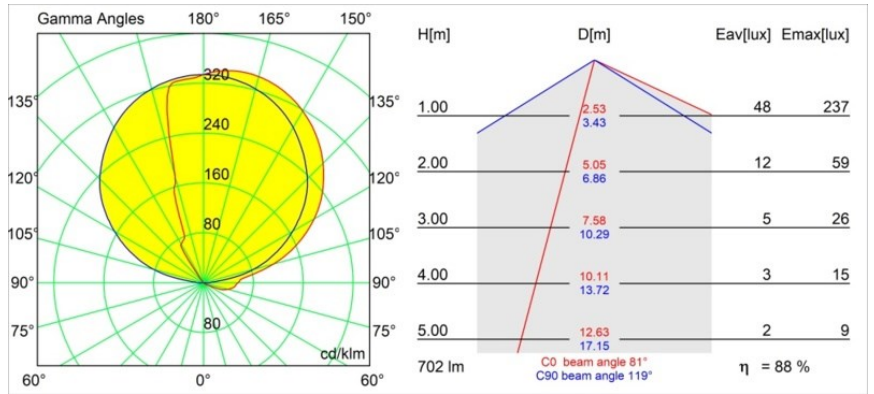

Diagrams