



ate	
customer	
roject	
уре	

Chival Wall Up/Down 292 2x LED 3000K DE Grey White Structure

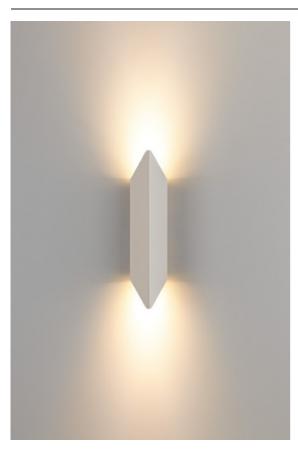

Formed by one single, pleated plate, Chival shows elements of sharp design and refined craftsmanship. Its up and down vertical light is a natural continuation of the shape, which was inspired by medieval coats of arms. Alone, Chival is beautiful and timeless. Try two or more, and you'll see a conversation of shadow, light and patterns taking shape.





Specifications				
Material	13760736			
Light Source Type	LED			
LED Type	CREE 1304			
LED technology	LED COB			
CRI	Min. 90			
Colour Temperature	3000K			
Lifetime	L90B10 @50,000 Hours			
Lamp Included	Yes			
Number of Light Sources	2			
CIE flux code	87 94 98 50 69			
Binning (SDCM)	2			
Light Direction	Up/Down			
Optic	Collimator			
Measured beam angle (°)	34.0			
Input Voltage	Constant Current Driver Required			
Electrical Class	III			
IP Rating	20			
Glow wire rating (°C)	960			
Indoor/Outdoor	Indoor			
Application	Wall			
Mounting	Surface			
Adjustability	Not Applicable			
Distance to Lighted Object (m)	0,1			
Primary Colour & Primary Finish	Grey White	e, Structure		
Gross weight (g)	370.0			
Drive current (mA)	350	500		
Min. forward voltage (Vf)	7,5	7,8		
Max. forward voltage (Vf)	9,5	9,8		
Connected load (W)	3,0	4,4		
Luminous flux per lamp (lm)	528	713		
Efficacy (Im/W)	88	81		
Glare rating	28	29		



TM30 & CRI diagram





Light distribution & beam diagram

