



| Date     |
|----------|
| Customer |
| Project  |
| Туре     |

## Chival Wall Up/Down 292 2x LED 1800-3000K WD DALI/Push-Dim DI Silver Bronze Brushed Anodised

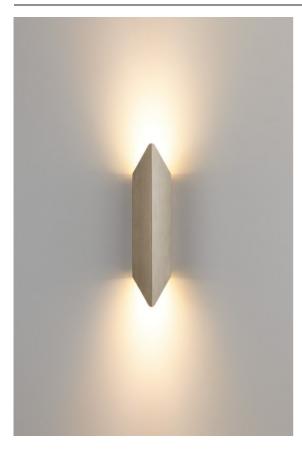

Formed by one single, pleated plate, Chival shows elements of sharp design and refined craftsmanship. Its up and down vertical light is a natural continuation of the shape, which was inspired by medieval coats of arms. Alone, Chival is beautiful and timeless. Try two or more, and you'll see a conversation of shadow, light and patterns taking shape.



Luminous flux per lamp

Efficacy (Im/W)

Glare rating

(Im)

483

46


27



| 1 3                             |                                 |
|---------------------------------|---------------------------------|
| Material                        | 13760584                        |
| Light Source Type               | LED                             |
| LED Type                        | BRIDGELUX WARMDIM 4W            |
| LED technology                  | LED COB                         |
| CRI                             | Min. 95                         |
| Colour Temperature              | 1800-3000K (Warm Dim)           |
| Lifetime                        | L90B10 @50,000 Hours            |
| Lamp Included                   | Yes                             |
| Number of Light<br>Sources      | 2                               |
| CIE flux code                   | 85 95 99 50 56                  |
| Binning (SDCM)                  | 3                               |
| Light Direction                 | Up/Down                         |
| Optic                           | Collimator                      |
| Measured beam angle (°)         | 44.0                            |
| Input Voltage                   | 230V                            |
| Luminaire power (W)             | 10.6                            |
| Electrical Class                | 1                               |
| IP Rating                       | 20                              |
| Glow wire rating (°C)           | 960                             |
| Dimming Protocol                | DALI, Push-Dim                  |
| DALI Standard                   | DALI-2                          |
| Indoor/Outdoor                  | Indoor                          |
| Application                     | Wall                            |
| Mounting                        | Surface                         |
| Adjustability                   | Not Applicable                  |
| Distance to Lighted Object (m)  | 0,1                             |
| Primary Colour & Primary Finish | Silver Bronze, Brushed Anodised |
| Gross weight (g)                | 500.0                           |



## TM30 & CRI diagram





## Light distribution & beam diagram

