
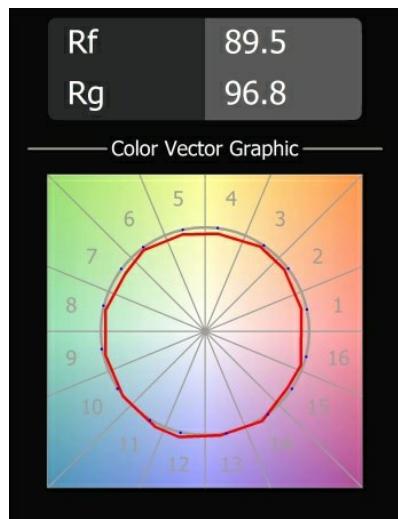

Chival Wall Up/Down 292 2x LED 2700K DE Black Chrome


Specifications

| | | |
|---------------------------------|----------------------------------|-----|
| Material | 13760680 | |
| Light Source Type | LED | |
| LED Type | CREE 1304 | |
| LED technology | LED COB | |
| CRI | Min. 90 | |
| Colour Temperature | 2700K | |
| Lifetime | L90B10 @50,000 Hours | |
| Lamp Included | Yes | |
| Number of Light Sources | 2 | |
| CIE flux code | 91 97 99 50 67 | |
| Binning (SDCM) | 2 | |
| Light Direction | Up/Down | |
| Optic | Collimator | |
| Measured beam angle (°) | 34.0 | |
| Input Voltage | Constant Current Driver Required | |
| Electrical Class | III | |
| IP Rating | 20 | |
| Glow wire rating (°C) | 960 | |
| Indoor/Outdoor | Indoor | |
| Application | Wall | |
| Mounting | Surface | |
| Adjustability | Not Applicable | |
| Distance to Lighted Object (m) | 0,1 | |
| Primary Colour & Primary Finish | Black, Chrome | |
| Gross weight (g) | 370.0 | |
| Drive current (mA) | 350 | 500 |
| Min. forward voltage (Vf) | 7,5 | 7,8 |
| Max. forward voltage (Vf) | 9,5 | 9,8 |
| Connected load (W) | 3,0 | 4,4 |
| Luminous flux per lamp (lm) | 513 | 693 |
| Efficacy (lm/W) | 85 | 79 |
| Glare rating | 23 | 24 |

Formed by one single, pleated plate, Chival shows elements of sharp design and refined craftsmanship. Its up and down vertical light is a natural continuation of the shape, which was inspired by medieval coats of arms. Alone, Chival is beautiful and timeless. Try two or more, and you'll see a conversation of shadow, light and patterns taking shape.

TM30 & CRI diagram

Light distribution & beam diagram
