


Date
Customer
Project
Type

Minude Kompas Suspended 45 1x LED 2700K Medium DE Black Chrome



Specifications


Material	11465280
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 60
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	29.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Suspended
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Chrome
Gross weight (g)	291.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	14,8 15,2
Max. forward voltage (Vf)	18,0 18,6
Connected load (W)	5,7 8,5
Luminous flux per lamp (lm)	429 578
Efficacy (lm/W)	75 68
Glare rating	1 1
Remark	<ul style="list-style-type: none"> This is not a complete product. Kompas Round system required.

Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.

TM30 & CRI diagram



Light distribution & beam diagram

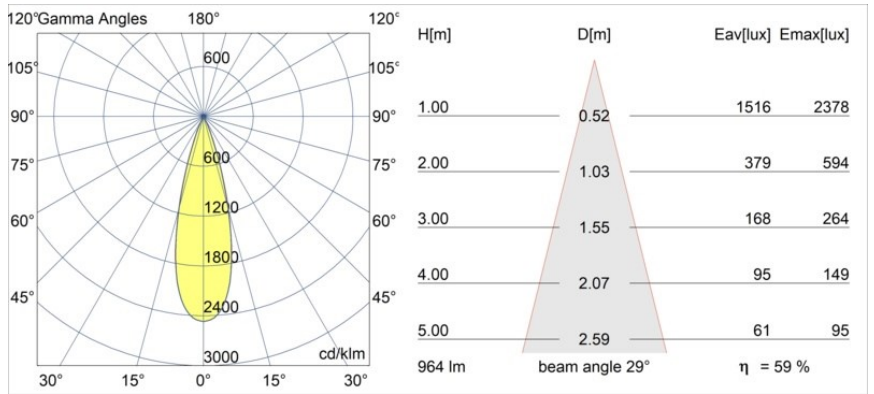

Diagrams

Installation Accessories

- **13570632** Kompas Round Surface 340 DE Black Structure
- **13571209** Kompas Round Surface 340 50W 1-10V DI 500mA White Structure
- **13571232** Kompas Round Surface 340 50W 1-10V DI 500mA Black Structure
- **13571309** Kompas Round Surface 340 50W DALI DI 500mA White Structure
- **13571332** Kompas Round Surface 340 50W DALI DI 500mA Black Structure
- **13571409** Kompas Round Surface 340 100W Casambi DI 350mA White Structure
- **13571432** Kompas Round Surface 340 100W Casambi DI 350mA Black Structure
- **13571509** Kompas Round Surface 340 100W Casambi DI 500mA White Structure
- **13571532** Kompas Round Surface 340 100W Casambi DI 500mA Black Structure
- **13571609** Kompas Round Surface 340 50W Casambi DI 350mA White Structure
- **13571632** Kompas Round Surface 340 50W Casambi DI 350mA Black Structure
- **13571709** Kompas Round Surface 340 50W Casambi DI 500mA White Structure
- **13571732** Kompas Round Surface 340 50W Casambi DI 500mA Black Structure
- **13570009** Kompas Round Surface 340 60W Trailing Edge DI 350mA White Structure
- **13570032** Kompas Round Surface 340 60W Trailing Edge DI 350mA Black Structure
- **13570132** Kompas Round Surface 340 100W 1-10V DI 350mA Black Structure
- **13570209** Kompas Round Surface 340 100W DALI DI 350mA White Structure
- **13570232** Kompas Round Surface 340 100W DALI DI 350mA Black Structure
- **13570309** Kompas Round Surface 340 60W Trailing Edge DI 500mA White Structure
- **13570332** Kompas Round Surface 340 60W Trailing Edge DI 500mA Black Structure
- **13570409** Kompas Round Surface 340 100W 1-10V DI 500mA White Structure
- **13570432** Kompas Round Surface 340 100W 1-10V DI 500mA Black Structure
- **13570509** Kompas Round Surface 340 100W DALI DI 500mA White Structure
- **13570532** Kompas Round Surface 340 100W DALI DI 500mA Black Structure
- **13570609** Kompas Round Surface 340 DE White Structure
- **13570809** Kompas Round Surface 340 30W Trailing Edge DI 350mA White Structure
- **13570832** Kompas Round Surface 340 30W Trailing Edge DI 350mA Black Structure
- **13570909** Kompas Round Surface 340 50W 1-10V DI 350mA White Structure
- **13570932** Kompas Round Surface 340 50W 1-10V DI 350mA Black Structure
- **13571009** Kompas Round Surface 340 50W DALI DI 350mA White Structure
- **13571032** Kompas Round Surface 340 50W DALI DI 350mA Black Structure
- **13571109** Kompas Round Surface 340 30W Trailing Edge DI 500mA White Structure
- **13571132** Kompas Round Surface 340 30W Trailing Edge DI 500mA Black Structure
- **13570109** Kompas Round Surface 340 100W 1-10V DI 350mA White Structure

Choose a required accessory