


Date
Customer
Project
уре

Modest Recessed 74 1x IP55 LED 2700K Medium DE White Structure



An easy-to-install and accessible downlight that does not settle for anything less than high quality. Modest is a classic, recessed luminaire with a surprising rainbow of diversity. Enjoy its absolute simplicity and all the new styles it will bring.





13780009

Specification	S
Material	

Light Source Type	LED		
LED Type	BRIDGELUX V8G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L90B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	98 99 100 100 85		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Collimator		
Measured beam angle (°)	23.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	55		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling, Wall		
Mounting	Recessed		
Cut-out size (mm)	ø68		
Mounting depth (mm)	110.0		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	White, Structure		
Gross weight (g)	190.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	13,2	13,7	
Max. forward voltage (Vf)	15,0	15,4	
Connected load (W)	5,0	7,2	
Delivered lumens (Im)	545	739	
Efficacy (Im/W)	109	103	
Glare rating	13	14	
Damani	. This was	divide a suppose the iddentity of a suppose of a suppose of the su	

Remark

This product comes in different standard and full customisation options. Discover them all on the Modest Recessed web page or ask for a quote.



Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly Latest datasheet and documentation available on www.supermodular.com - 2025-07-25, 12:14:51 PM - ©Modular Lighting Instruments




TM30 & CRI diagram






Light distribution & beam diagram

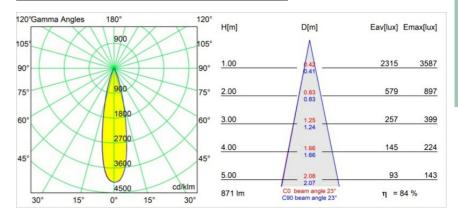



Installation Accessories



12293930 Plaster Kit 68 1x

Choose a required accessory