


Date	
Customer	
roject	_
уре	_

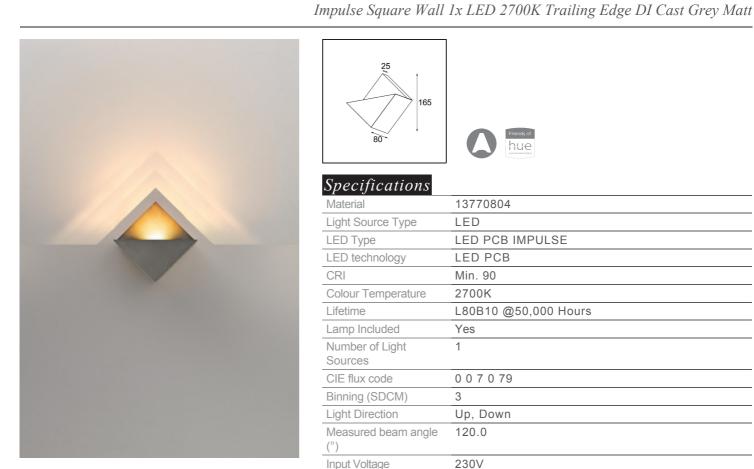

An abstract square shape that transforms into a poem of light and shadow. Impulse Square Wall brings a surprising light effect to any surface it touches.


	Friends of hue
--	-------------------

Specifications	
Material	13770804
Light Source Type	LED
LED Type	LED PCB IMPULSE
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	0 0 7 0 79
Binning (SDCM)	3
Light Direction	Up, Down
Measured beam angle (°)	120.0
Input Voltage	230V
Luminaire power (W)	7.5
Electrical Class	
IP Rating	20
IF Rauly	20
Glow wire rating (°C)	960
0	
Glow wire rating (°C)	960
Glow wire rating (°C) Dimming Protocol	960 Trailing Edge
Glow wire rating (°C) Dimming Protocol Indoor/Outdoor	960 Trailing Edge Indoor
Glow wire rating (°C) Dimming Protocol Indoor/Outdoor Application	960 Trailing Edge Indoor Wall
Glow wire rating (°C) Dimming Protocol Indoor/Outdoor Application Mounting	960 Trailing Edge Indoor Wall Surface
Glow wire rating (°C) Dimming Protocol Indoor/Outdoor Application Mounting Adjustability Distance to Lighted	960 Trailing Edge Indoor Wall Surface Not Applicable
Glow wire rating (°C) Dimming Protocol Indoor/Outdoor Application Mounting Adjustability Distance to Lighted Object (m) Primary Colour &	960 Trailing Edge Indoor Wall Surface Not Applicable 0,1
Glow wire rating (°C) Dimming Protocol Indoor/Outdoor Application Mounting Adjustability Distance to Lighted Object (m) Primary Colour & Primary Finish	960 Trailing Edge Indoor Wall Surface Not Applicable 0,1 Cast Grey, Matt
Glow wire rating (°C) Dimming Protocol Indoor/Outdoor Application Mounting Adjustability Distance to Lighted Object (m) Primary Colour & Primary Finish Gross weight (g)	960 Trailing Edge Indoor Wall Surface Not Applicable 0,1 Cast Grey, Matt 864.0
Glow wire rating (°C) Dimming Protocol Indoor/Outdoor Application Mounting Adjustability Distance to Lighted Object (m) Primary Colour & Primary Finish Gross weight (g) Delivered lumens (Im)	960 Trailing Edge Indoor Wall Surface Not Applicable 0,1 Cast Grey, Matt 864.0 500




TM30 & CRI diagram





Light distribution & beam diagram

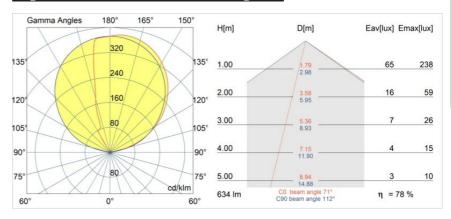

Diagrams