



Date
Customer
Project
Type

*Impulse Square Wall 1x LED 3000K DALI/Push-Dim DI Cast Grey Matt*

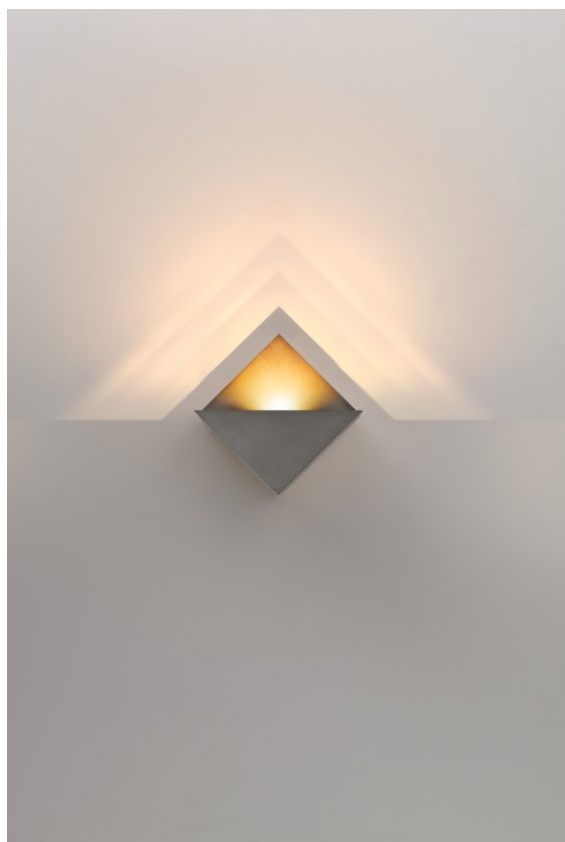

An abstract square shape that transforms into a poem of light and shadow. Impulse Square Wall brings a surprising light effect to any surface it touches.

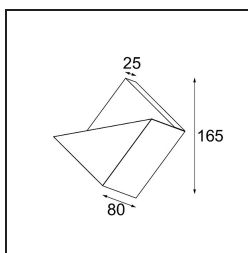

**Specifications**

Material	13771104
Light Source Type	LED
LED Type	LED PCB IMPULSE
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	0 0 7 0 79
Binning (SDCM)	3
Light Direction	Up, Down
Measured beam angle (°)	120.0
Input Voltage	230V
Luminaire power (W)	7.7
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI, Push-Dim
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Cast Grey, Matt
Gross weight (g)	911.0
Luminous flux per lamp (lm)	554
Efficacy (lm/W)	72
Glare rating	1

**TM30 & CRI diagram**



**Light distribution & beam diagram**

