


Date
Customer
Project
Type

*Sulfer Wall Up/Down 2x LED 2700K Trailing Edge DI Cast Grey Matt*




**Specifications**


Material	13270004
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
CIE flux code	61 94 100 50 52
Binning (SDCM)	2
Light Direction	Up/Down
Input Voltage	230V
Luminaire power (W)	6.6
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Cast Grey, Matt
Gross weight (g)	725.0
Delivered lumens (lm)	313
Efficacy (lm/W)	47
Glare rating	15

Sulfer is a minimalistic square-shaped luminaire. The cast aluminium housing brings a modern accent to walls, whether they're in- or outside (IP54) homes, hotels, restaurants, and more. Sulfer diffuses a wide beam (flood), which can be customised by an additional beam angle plate (medium and small). A recessed light source and a diffuser ensure only indirect and soft light.

**TM30 & CRI diagram**

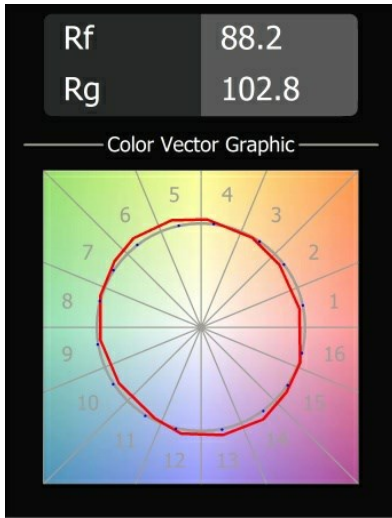


**Light distribution & beam diagram**

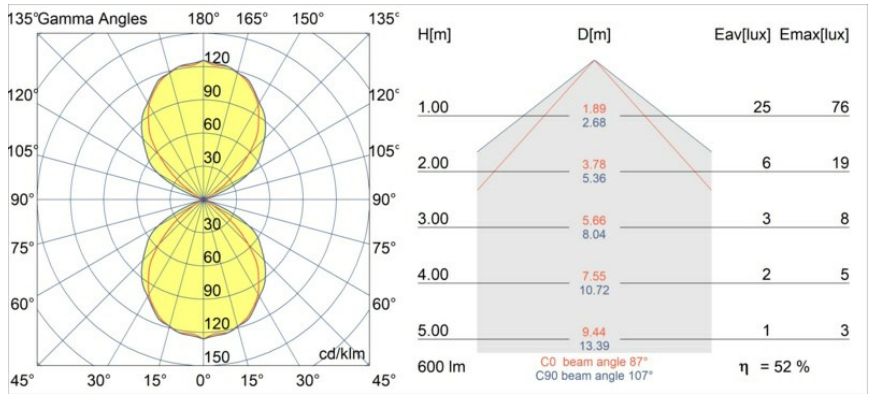


Diagrams

**Optical Accessories**



- 13271009** Beam Aperture Plate Sulfer Spot White Structure
- 13271032** Beam Aperture Plate Sulfer Spot Black Structure



- 13271109** Beam Aperture Plate Sulfer Medium White Structure
- 13271132** Beam Aperture Plate Sulfer Medium Black Structure

Choose a required accessory