


Date
Customer
Project
Type

Sulfer Wall Up/Down 2x LED 2700K Trailing Edge DI Cast Grey Matt



Sulfer is a minimalistic square-shaped luminaire. The cast aluminium housing brings a modern accent to walls, whether they're in- or outside (IP54) homes, hotels, restaurants, and more. Sulfer diffuses a wide beam (flood), which can be customised by an additional beam angle plate (medium and small). A recessed light source and a diffuser ensure only indirect and soft light.



Specifications


Material	13270004
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
CIE flux code	61 94 100 50 52
Binning (SDCM)	2
Light Direction	Up/Down
Input Voltage	230V
Luminaire power (W)	6.6
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Cast Grey, Matt
Gross weight (g)	725.0
Delivered lumens (lm)	313
Efficacy (lm/W)	47
Glare rating	15

Specifications

TM30 & CRI diagram




Light distribution & beam diagram

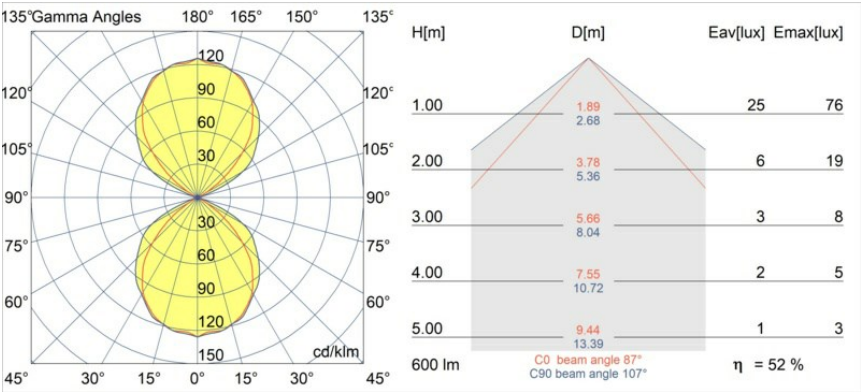


Diagrams

Optical Accessories



13271009 Beam Aperture Plate Sulfer Spot White Structure

13271032 Beam Aperture Plate Sulfer Spot Black Structure



13271109 Beam Aperture Plate Sulfer Medium White Structure

13271132 Beam Aperture Plate Sulfer Medium Black Structure

Choose a required accessory