



|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

*Extruded Stripped Suspended 46 600 1x LED 2700K Flood DE Champagne Anodised*

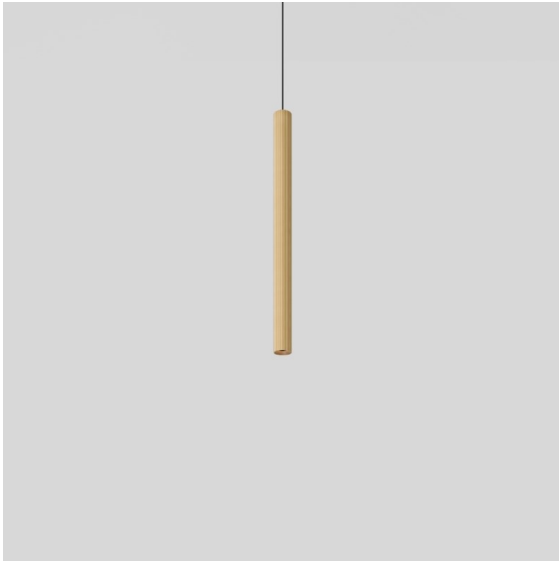


Strong lines that blend. Extruded Stripped is a contemporary design that harmonizes smoothly with its environment. This new family welcomes statement and stillness in a very minimalist look.




### Specifications

|                                 |                                  |      |
|---------------------------------|----------------------------------|------|
| Material                        | 13790341                         |      |
| Light Source Type               | LED                              |      |
| LED Type                        | BRIDGELUX V6 HD G8               |      |
| LED technology                  | LED COB                          |      |
| CRI                             | Min. 90                          |      |
| Colour Temperature              | 2700K                            |      |
| Lifetime                        | L80B10 @50,000 Hours             |      |
| Lamp Included                   | Yes                              |      |
| Number of Light Sources         | 1                                |      |
| CIE flux code                   | 96 100 100 100 79                |      |
| Binning (SDCM)                  | 2                                |      |
| Light Direction                 | Down                             |      |
| Optic                           | Reflector                        |      |
| Measured beam angle (°)         | 43.0                             |      |
| Input Voltage                   | Constant Current Driver Required |      |
| Electrical Class                | III                              |      |
| IP Rating                       | 20                               |      |
| Glow wire rating (°C)           | 960                              |      |
| Indoor/Outdoor                  | Indoor                           |      |
| Application                     | Ceiling                          |      |
| Mounting                        | Suspended                        |      |
| Adjustability                   | Not Applicable                   |      |
| Distance to Lighted Object (m)  | 0,1                              |      |
| Primary Colour & Primary Finish | Champagne, Anodised              |      |
| Gross weight (g)                | 1542.0                           |      |
| Drive current (mA)              | 350                              | 500  |
| Min. forward voltage (Vf)       | 15,4                             | 15,8 |
| Max. forward voltage (Vf)       | 18,8                             | 19,4 |
| Connected load (W)              | 6,0                              | 8,8  |
| Luminous flux per lamp (lm)     | 577                              | 779  |
| Efficacy (lm/W)                 | 96                               | 89   |
| Glare rating                    | 23                               | 25   |


TM30 & CRI diagram

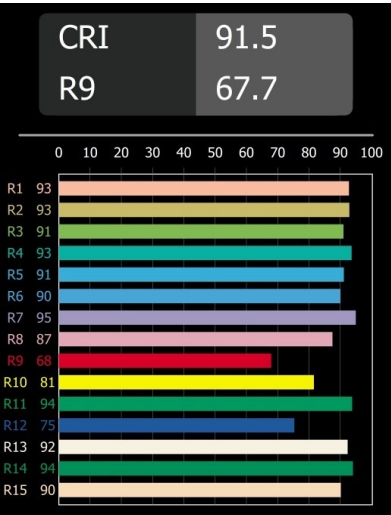


Light distribution & beam diagram

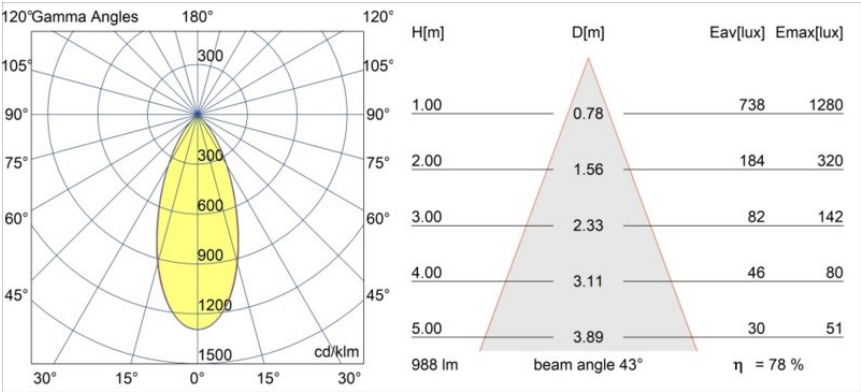


## Installation Accessories




- 13570709** Suspension Point Kompas White Structure  
**13570732** Suspension Point Kompas Black Structure



- 13791032** Power Feed and Suspension Canopy Semi-Recessed Round 2P Extruded Stripped DE Black Structure  
**13791036** Power Feed and Suspension Canopy Semi-Recessed Round 2P Extruded Stripped DE Grey White Structure



- 13791132** Power Feed and Suspension Canopy Surface Round 2P Extruded Stripped DE Black Structure  
**13791136** Power Feed and Suspension Canopy Surface Round 2P Extruded Stripped DE Grey White Structure



- 13791232** Power Feed and Suspension Canopy Surface Round Extruded Stripped Trailing Edge DI 350mA Black Structure  
**13791236** Power Feed and Suspension Canopy Surface Round Extruded Stripped Trailing Edge DI 350mA Grey White Structure  
**13791332** Power Feed and Suspension Canopy Surface Round Extruded Stripped DALI/Push-Dim DI 350mA Black Structure  
**13791336** Power Feed and Suspension Canopy Surface Round Extruded Stripped DALI/Push-Dim DI 350mA Grey White Structure  
**13791432** Power Feed and Suspension Canopy Surface Round Extruded Stripped Trailing Edge DI 500mA Black Structure  
**13791436** Power Feed and Suspension Canopy Surface Round Extruded Stripped Trailing Edge DI 500mA Grey White Structure  
**13791532** Power Feed and Suspension Canopy Surface Round Extruded Stripped DALI/Push-Dim DI 500mA Black Structure  
**13791536** Power Feed and Suspension Canopy Surface Round Extruded Stripped DALI/Push-Dim DI 500mA Grey White Structure

- 13570632** Kompas Round Surface 340 DE Black Structure  
**13571209** Kompas Round Surface 340 50W 1-10V DI 500mA White Structure  
**13571232** Kompas Round Surface 340 50W 1-10V DI 500mA Black Structure  
**13571309** Kompas Round Surface 340 50W DALI DI 500mA White Structure  
**13571332** Kompas Round Surface 340 50W DALI DI 500mA Black Structure

|                 |                                                                     |
|-----------------|---------------------------------------------------------------------|
| <b>13571409</b> | Kompas Round Surface 340 100W Casambi DI 350mA White Structure      |
| <b>13571432</b> | Kompas Round Surface 340 100W Casambi DI 350mA Black Structure      |
| <b>13571509</b> | Kompas Round Surface 340 100W Casambi DI 500mA White Structure      |
| <b>13571532</b> | Kompas Round Surface 340 100W Casambi DI 500mA Black Structure      |
| <b>13571609</b> | Kompas Round Surface 340 50W Casambi DI 350mA White Structure       |
| <b>13571632</b> | Kompas Round Surface 340 50W Casambi DI 350mA Black Structure       |
| <b>13571709</b> | Kompas Round Surface 340 50W Casambi DI 500mA White Structure       |
| <b>13571732</b> | Kompas Round Surface 340 50W Casambi DI 500mA Black Structure       |
| <b>13570009</b> | Kompas Round Surface 340 60W Trailing Edge DI 350mA White Structure |
| <b>13570032</b> | Kompas Round Surface 340 60W Trailing Edge DI 350mA Black Structure |
| <b>13570132</b> | Kompas Round Surface 340 100W 1-10V DI 350mA Black Structure        |
| <b>13570209</b> | Kompas Round Surface 340 100W DALI DI 350mA White Structure         |
| <b>13570232</b> | Kompas Round Surface 340 100W DALI DI 350mA Black Structure         |
| <b>13570309</b> | Kompas Round Surface 340 60W Trailing Edge DI 500mA White Structure |
| <b>13570332</b> | Kompas Round Surface 340 60W Trailing Edge DI 500mA Black Structure |
| <b>13570409</b> | Kompas Round Surface 340 100W 1-10V DI 500mA White Structure        |
| <b>13570432</b> | Kompas Round Surface 340 100W 1-10V DI 500mA Black Structure        |
| <b>13570509</b> | Kompas Round Surface 340 100W DALI DI 500mA White Structure         |
| <b>13570532</b> | Kompas Round Surface 340 100W DALI DI 500mA Black Structure         |
| <b>13570609</b> | Kompas Round Surface 340 DE White Structure                         |
| <b>13570809</b> | Kompas Round Surface 340 30W Trailing Edge DI 350mA White Structure |
| <b>13570832</b> | Kompas Round Surface 340 30W Trailing Edge DI 350mA Black Structure |
| <b>13570909</b> | Kompas Round Surface 340 50W 1-10V DI 350mA White Structure         |
| <b>13570932</b> | Kompas Round Surface 340 50W 1-10V DI 350mA Black Structure         |
| <b>13571009</b> | Kompas Round Surface 340 50W DALI DI 350mA White Structure          |
| <b>13571032</b> | Kompas Round Surface 340 50W DALI DI 350mA Black Structure          |
| <b>13571109</b> | Kompas Round Surface 340 30W Trailing Edge DI 500mA White Structure |
| <b>13571132</b> | Kompas Round Surface 340 30W Trailing Edge DI 500mA Black Structure |
| <b>13570109</b> | Kompas Round Surface 340 100W 1-10V DI 350mA White Structure        |

 Choose a required accessory