


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Extruded Stripped Track 48V Suspended 46 300 1x LED 2700K Flood 1-10V DI Black Anodised





Strong lines that blend. Extruded Stripped is a contemporary design that harmonizes smoothly with its environment. This new family welcomes statement and stillness in a very minimalist look.



Specifications

| | |
|---------------------------------|---|
| Material | 13800081 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V6 HD G8 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 96 100 100 100 79 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Reflector |
| Measured beam angle (°) | 43.0 |
| Input Voltage | 48Vdc |
| Luminaire power (W) | 10.3 |
| Electrical Class | III |
| IP Rating | 20 |
| Dimming Protocol | 1-10V |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Mounting | Suspended |
| Primary Colour & Primary Finish | Black, Anodised |
| Gross weight (g) | 995.0 |
| Luminous flux per lamp (lm) | 779 |
| Efficacy (lm/W) | 76 |
| Glare rating | 25 |
| Remark | <ul style="list-style-type: none"> • This is not a complete product. Pista track 48V system required. • For installations without dimmer, it is recommended to use 1-10 V luminaires. |

TM30 & CRI diagram

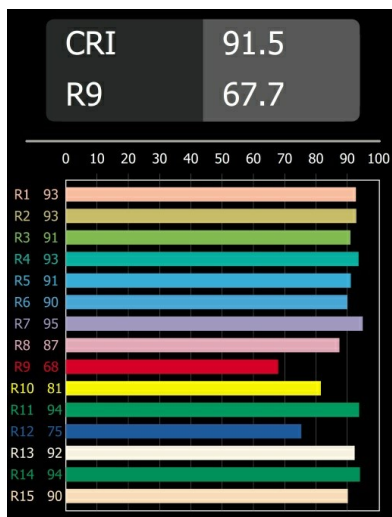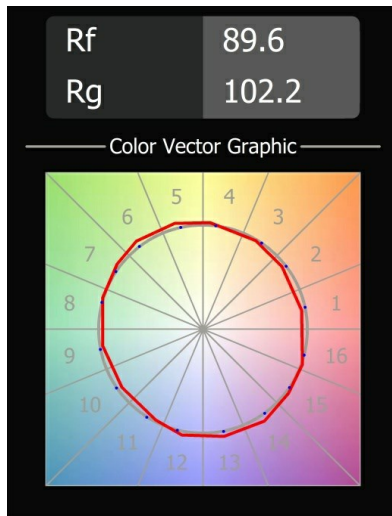

Light distribution & beam diagram

