


Date
Customer
Project
Type

*Extruded Stripped Track 48V Suspended 46 300 1x LED 2700K Flood 1-10V DI Black Anodised*



Strong lines that blend. Extruded Stripped is a contemporary design that harmonizes smoothly with its environment. This new family welcomes statement and stillness in a very minimalist look.




### Specifications

Material	13800081
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	96 100 100 100 79
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	43.0
Input Voltage	48Vdc
Luminaire power (W)	10.3
Electrical Class	III
IP Rating	20
Dimming Protocol	1-10V
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Suspended
Primary Colour & Primary Finish	Black, Anodised
Gross weight (g)	995.0
Luminous flux per lamp (lm)	779
Efficacy (lm/W)	76
Glare rating	25
Remark	<ul style="list-style-type: none"> <li>• This is not a complete product. Pista track 48V system required.</li> <li>• For installations without dimmer, it is recommended to use 1-10 V luminaires.</li> </ul>

**TM30 & CRI diagram**



**Light distribution & beam diagram**

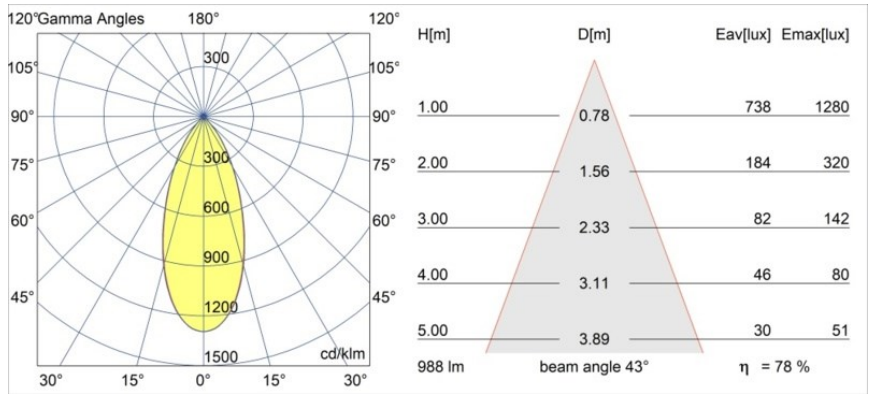

Diagrams