



Date
Customer
Project
уре

## Modest Recessed 74 1x IP55 LED 2700K Medium DE Black Structure



An easy-to-install and accessible downlight that does not settle for anything less than high quality. Modest is a classic, recessed luminaire with a surprising rainbow of diversity. Enjoy its absolute simplicity and all the new styles it will bring.





$\alpha$			c·	, .		ı
7	ne	C11	tic	atı	ons	ı
┙,	$\rho$ $\circ$	ر، ب	"		0.00	

Material	13780032		
Light Source Type	LED		
LED Type	BRIDGELU	X V8G8	
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L90B10 @	50,000 Hours	
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	100 100 100 100 84		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Collimator		
Measured beam angle (°)	23.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	55		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling, Wall		
Mounting	Recessed		
Cut-out size (mm)	ø68		
Mounting depth (mm)	110.0		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Black, Structure		
Gross weight (g)	190.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	13,2	13,7	
Max. forward voltage (Vf)	15,0	15,4	
Connected load (W)	5,0	7,2	
Delivered lumens (lm)	542	735	
Efficacy (Im/W)	108	102	
Glare rating	8	9	

Remark

This product comes in different standard and full customisation options. Discover them all on the Modest Recessed web page or ask for a quote.



Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly Latest datasheet and documentation available on www.supermodular.com - 2025-08-04, 12:46:52 AM - ©Modular Lighting Instruments




## TM30 & CRI diagram






## Light distribution & beam diagram

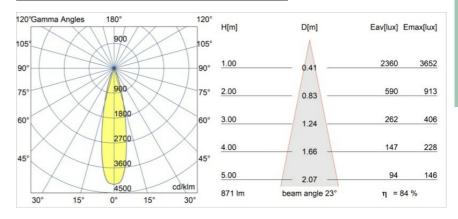



## Installation Accessories



12293930 Plaster Kit 68 1x

Choose a required accessory