


Date
Customer
Project
Type

Modest Recessed 74 1x IP55 LED 2700K Medium DE Black Structure





An easy-to-install and accessible downlight that does not settle for anything less than high quality. Modest is a classic, recessed luminaire with a surprising rainbow of diversity. Enjoy its absolute simplicity and all the new styles it will bring.

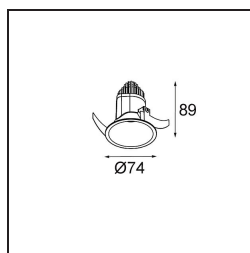


Specifications

Material	13780032
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 84
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	23.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø68
Mounting depth (mm)	110.0
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	190.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	13,2 13,7
Max. forward voltage (Vf)	15,0 15,4
Connected load (W)	5,0 7,2
Delivered lumens (lm)	542 735
Efficacy (lm/W)	108 102
Glare rating	8 9
Remark	<ul style="list-style-type: none"> This product comes in different standard and full customisation options. Click on the buttons above to discover them all or ask for a quote.

TM30 & CRI diagram

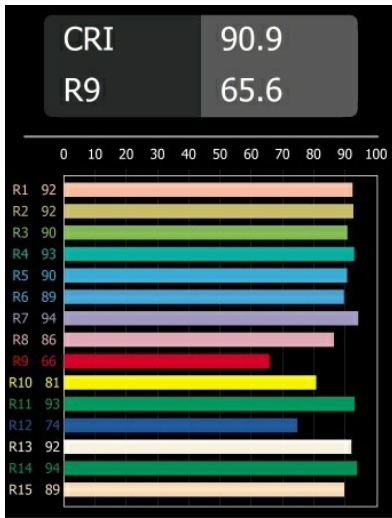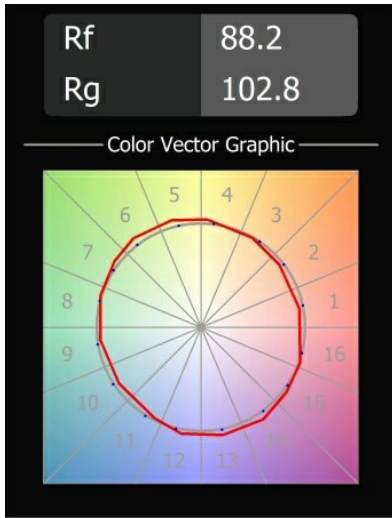


Light distribution & beam diagram

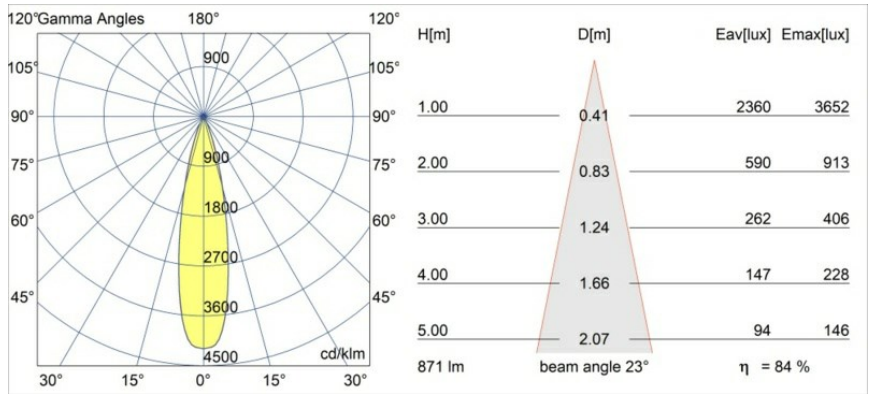


Diagrams

Installation Accessories

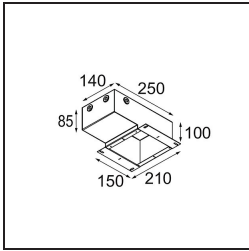

11624030 Installation Housing 140x250x100x210



12292630 Gypsum Fibreboard 150x150

Choose a required accessory