
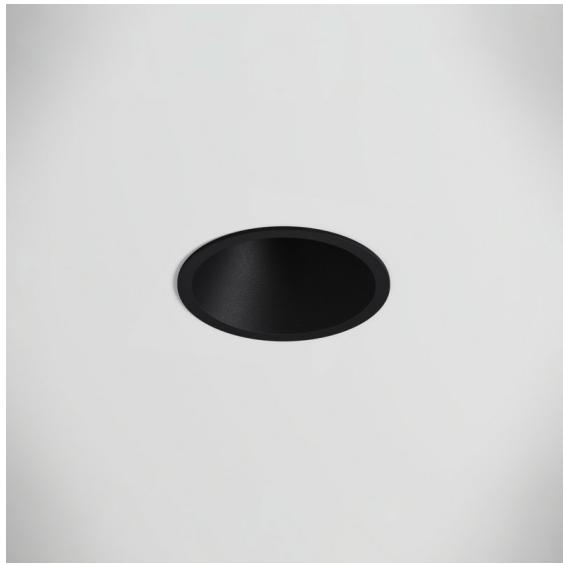
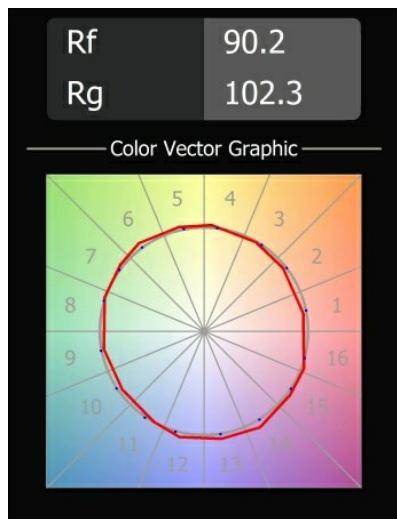
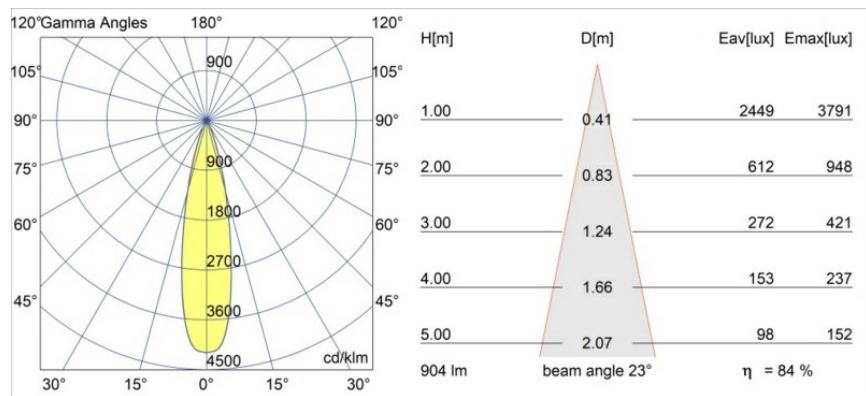

Modest Recessed 74 1x IP55 LED 3000K Medium DE Black Structure

Specifications


Material	13780132	
Light Source Type	LED	
LED Type	BRIDGELUX V8G8	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	3000K	
Lifetime	L90B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	100 100 100 100 84	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Collimator	
Measured beam angle (°)	23.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	55	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Recessed	
Cut-out size (mm)	Ø68	
Mounting depth (mm)	110.0	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Black, Structure	
Gross weight (g)	190.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	13,2	13,7
Max. forward voltage (Vf)	15,0	15,4
Connected load (W)	5,0	7,2
Luminous flux per lamp (lm)	562	763
Efficacy (lm/W)	112	106
Glare rating	8	9
Remark	• This product comes in different Direct Custom options. Discover them all on the Modest	

An easy-to-install and accessible downlight that does not settle for anything less than high quality. Modest is a classic, recessed luminaire with a surprising rainbow of diversity. Enjoy its absolute simplicity and all the new styles it will bring.

Recessed web page or ask for a quote.

TM30 & CRI diagram

Light distribution & beam diagram


Installation Accessories



12293930 Plaster Kit 68 1x

 Choose a required accessory