


Date
Customer
Project
Type

Modest Recessed 74 1x IP55 LED 3000K Medium DE Black Structure



An easy-to-install and accessible downlight that does not settle for anything less than high quality. Modest is a classic, recessed luminaire with a surprising rainbow of diversity. Enjoy its absolute simplicity and all the new styles it will bring.

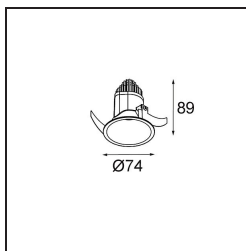

Specifications


Material	13780132
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 84
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	23.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø68
Mounting depth (mm)	110.0
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	190.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	13,2 13,7
Max. forward voltage (Vf)	15,0 15,4
Connected load (W)	5,0 7,2
Delivered lumens (lm)	562 763
Efficacy (lm/W)	112 106
Glare rating	8 9
Remark	<ul style="list-style-type: none"> This product comes in different standard and full customisation options. Discover them all on the Modest Recessed web page or ask for a quote.




MODULAR
LIGHTING —
INSTRUMENTS

Modest Recessed 74 lx IP55 LED 3000K Medium DE Black
Structure


TM30 & CRI diagram

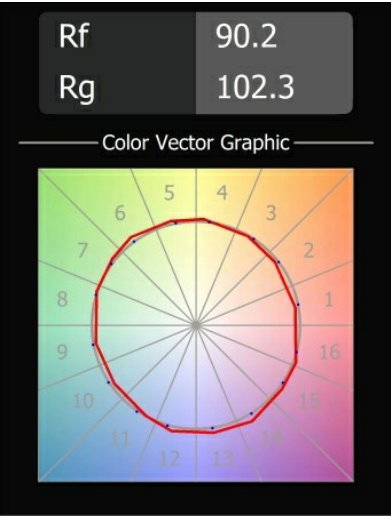

Light distribution & beam diagram

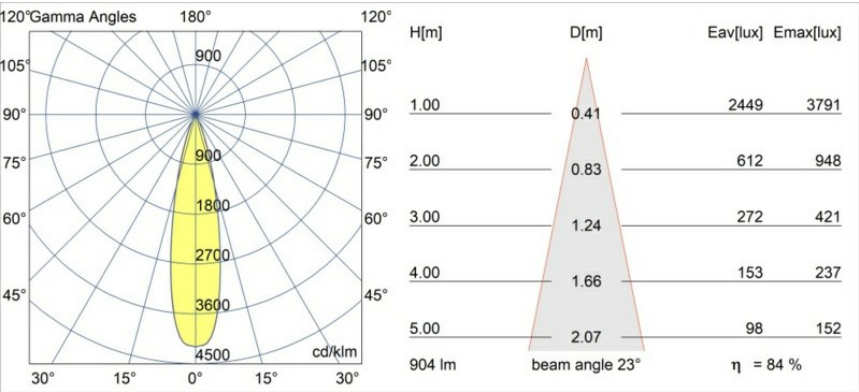

Installation Accessories

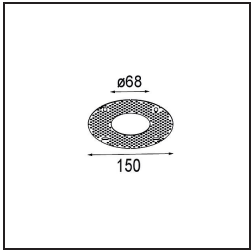

12293930 Plaster Kit 68 1x

Choose a required accessory