


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Modest Recessed 74 (Leaf Springs) 1x IP55 LED 3000K Medium DE Black Structure

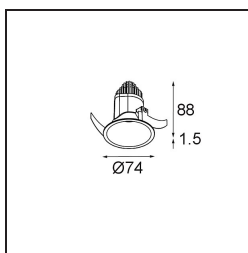

Specifications

| | |
|---------------------------------|----------------------------------|
| Material | 13780132 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V8G8 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L90B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 100 100 100 100 84 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Collimator |
| Measured beam angle (°) | 23.0 |
| Input Voltage | Constant Current Driver Required |
| Electrical Class | III |
| IP Rating | 55 |
| Glow wire rating (°C) | 960 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Mounting | Recessed |
| Cut-out size (mm) | ø68 |
| Mounting depth (mm) | 110.0 |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Structure |
| Gross weight (g) | 190.0 |
| Drive current (mA) | 350 500 |
| Min. forward voltage (Vf) | 13,2 13,7 |
| Max. forward voltage (Vf) | 15,0 15,4 |
| Connected load (W) | 5,0 7,2 |
| Luminous flux per lamp (lm) | 562 763 |
| Efficacy (lm/W) | 112 106 |
| Glare rating | 8 9 |

An easy-to-install and accessible downlight that does not settle for anything less than high quality. Modest is a classic, recessed luminaire with a surprising rainbow of diversity. Enjoy its absolute simplicity and all the new styles it will bring.


Remark

- This product comes in different Direct Custom options. Discover them all on the Modest Recessed web page or ask for a quote.
-

TM30 & CRI diagram




Light distribution & beam diagram

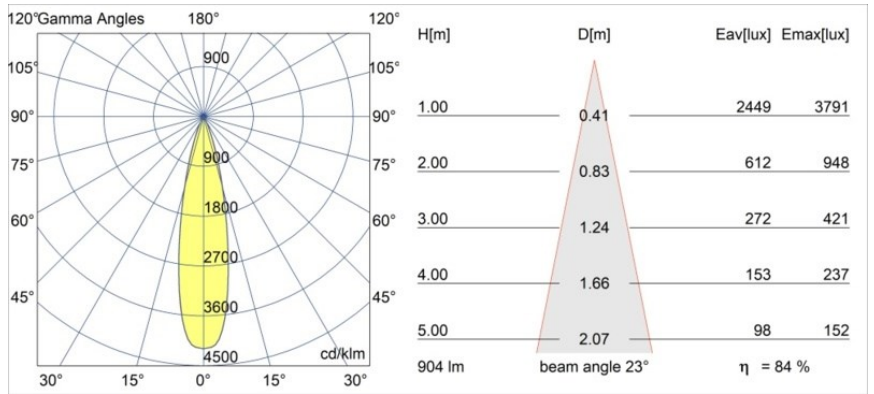

Diagrams

Installation Accessories

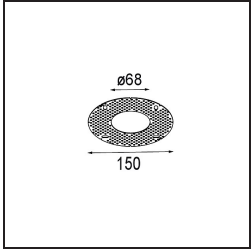

12293930 Plaster Kit 68 1x

Choose a required accessory