


Date
Customer
Project
уре

Minude Recessed 56 1x IP54 LED 2700K Medium DE Cast Grey Matt



Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.





Specifications				
Material	13650004	13650004		
Light Source Type	LED			
LED Type	BRIDGELUX V6 HD G7			
LED technology	LED COB			
CRI	Min. 90			
Colour Temperature	2700K			
Lifetime	L80B10 @50,000 Hours			
Lamp Included	Yes			
Number of Light Sources	1			
CIE flux code	100 100 100 100 66			
Binning (SDCM)	2			
Light Direction	Down			
Optic	Lens			
Measured beam angle (°)	29.0			
Input Voltage	Constant C	Current Driver Required		
Electrical Class	III			
IP Rating	54			
Glow wire rating (°C)	960			
Indoor/Outdoor	Indoor			
Application	Ceiling, Wall			
Mounting	Recessed			
Cut-out size (mm)	ø51			
Mounting depth (mm)	100.0			
Adjustability	Not Applicable			
Distance to Lighted Object (m)	0,1			
Primary Colour & Primary Finish	Cast Grey,	Matt		
Gross weight (g)	190.0			
Drive current (mA)	350	500		
Min. forward voltage (Vf)	14.8	15.2		
Max. forward voltage (Vf)	18.0	18.6		
Connected load (W)	5.7	8.5		
Delivered lumens (lm)	475	640		
Efficacy (Im/W)	83	75		

Glare rating




TM30 & CRI diagram






Light distribution & beam diagram

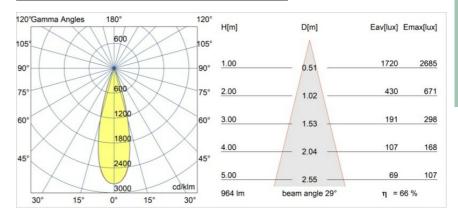





Installation Accessories



12293830 Plaster Kit 51 1x



11624030 Installation Housing 140x250x100x210



12292630 Gypsum Fibreboard 150x150

Choose a required accessory