

---




---



---



---

*Nyto Track 48V Adjustable 40 1x LED 2700K Medium DALI White Structure*

**Specifications**

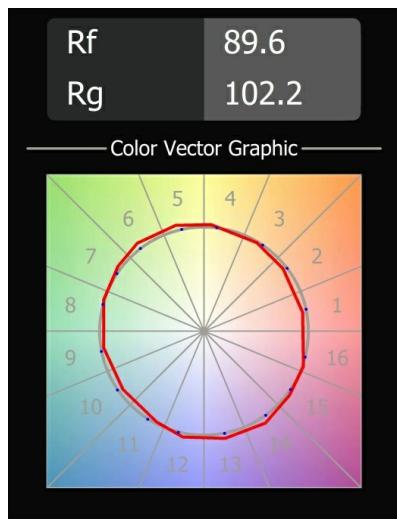
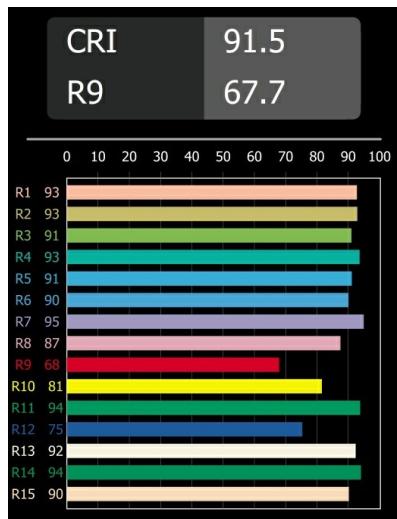
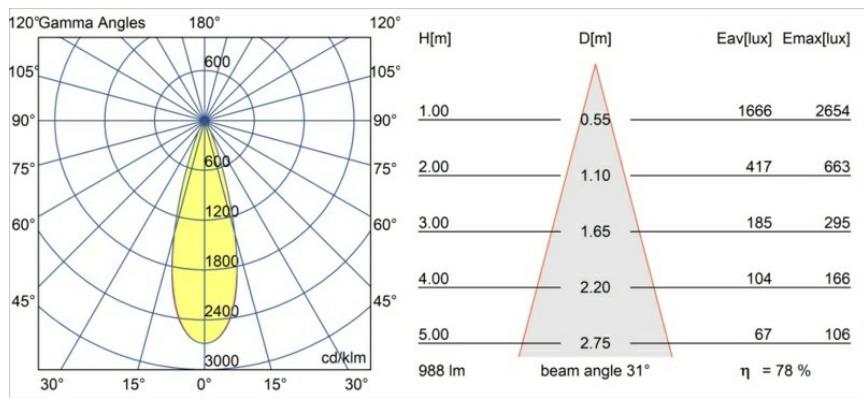
Material	13830509
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 79
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	31.0
Input Voltage	48Vdc
Luminaire power (W)	10.3
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	237.0
Luminous flux per lamp (lm)	780
Efficacy (lm/W)	76
Glare rating	14
Remark	<ul style="list-style-type: none"> <li>This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile Suspended Up/Down.</li> <li>White Pista 48V luminaires have a white track adapter. All other Pista 48V luminaires have a black track adapter. Deviation from this is only</li> </ul>

Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.


possible on request.

- This product comes in different standard and full customisation options. Discover them all on the Nyto Track 48V web page or ask for a quote.
- This is not a complete product. Pista track 48V system required.

---

**TM30 & CRI diagram**

**Light distribution & beam diagram**


## Optical Accessories



**10223032** Honeycomb 28 Black

Choose a required accessory