




Date \_\_\_\_\_  
Customer \_\_\_\_\_  
Project \_\_\_\_\_  
Type \_\_\_\_\_

*Nyto Track 48V Adjustable 40 1x LED 3000K Medium DALI Black Structure*



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.



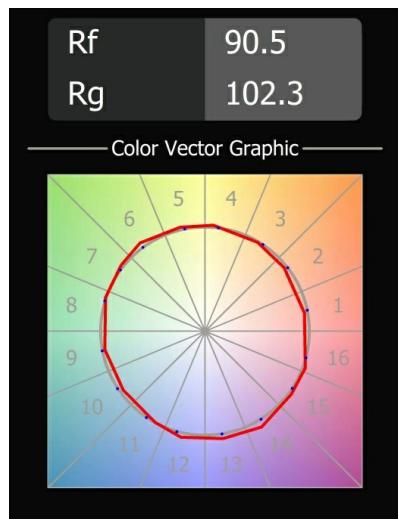
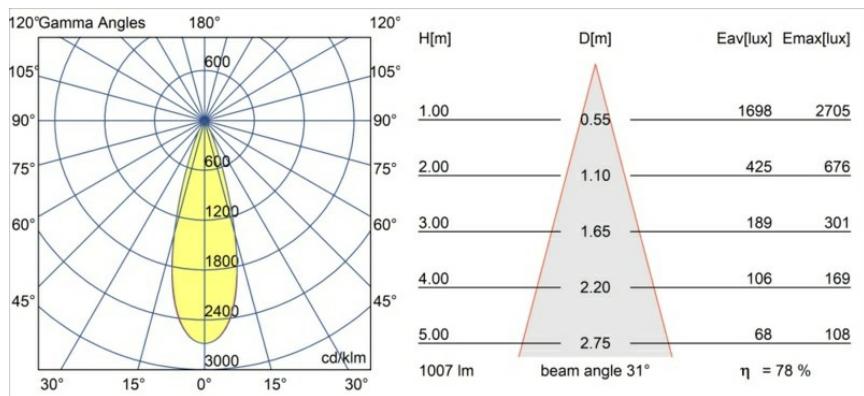
**Specifications**

Material	13831732
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 79
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	31.0
Input Voltage	48Vdc
Luminaire power (W)	10.3
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	237.0
Luminous flux per lamp (lm)	795
Efficacy (lm/W)	77
Glare rating	14
Remark	<ul style="list-style-type: none"><li>This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile Suspended Up/Down.</li><li>White Pista 48V luminaires have a white track adapter. All other Pista 48V luminaires have a black track adapter. Deviation from this is only</li></ul>


possible on request.

- This product comes in different standard and full customisation options. Discover them all on the Nyto Track 48V web page or ask for a quote.
- This is not a complete product. Pista track 48V system required.

---

*TM30 & CRI diagram*

*Light distribution & beam diagram*


## Optical Accessories



**10223032** Honeycomb 28 Black

Choose a required accessory