


Date
Customer
Project
Type

*Nyto Track 48V Adjustable 40 2x LED 3000K Medium DALI Black Structure*



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.



**Specifications**

Material	13833732
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
CIE flux code	99 100 100 100 79
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	31.0
Input Voltage	48Vdc
Luminaire power (W)	19.0
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	504.0
Luminous flux per lamp (lm)	795
Efficacy (lm/W)	84
Glare rating	14

---


**Remark**

- This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile Suspended Up/Down.
  - White Pista 48V luminaires have a white track adapter. All other Pista 48V luminaires have a black track adapter. Deviation from this is only possible on request.
  - This product comes in different standard and full customisation options. Discover them all on the Nyto Track 48V web page or ask for a quote.
  - This is not a complete product. Pista track 48V system required.
-

**TM30 & CRI diagram**




**Light distribution & beam diagram**

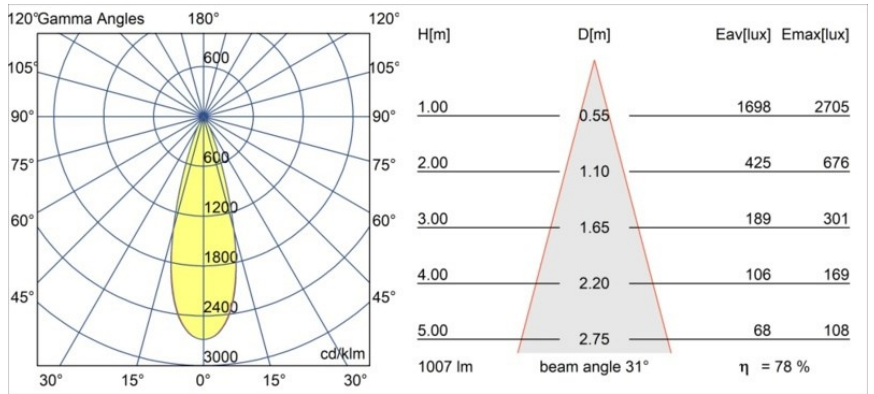

Diagrams

*Optical Accessories*

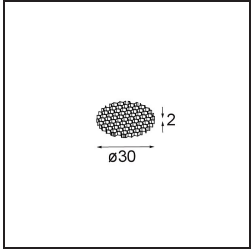

**10223032** Honeycomb 28 Black

Choose a required accessory