


Date
Customer
Project
Type

Nyto Semi-Recessed Adjustable 40 1x LED 2700K Medium DE Black Structure



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.

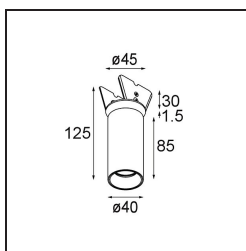

Specifications

Material	13835132
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 79
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	31.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Semi-Recessed
Cut-out size (mm)	ø40
Mounting depth (mm)	110.0
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	223.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	15,4 15,8
Max. forward voltage (Vf)	18,8 19,4
Connected load (W)	6,0 8,8
Delivered lumens (lm)	577 780
Efficacy (lm/W)	96 89
Glare rating	13 14
Remark	<ul style="list-style-type: none"> This product comes in different standard and full customisation options. Discover them all on the



MODULAR
LIGHTING —
INSTRUMENTS

Nyto Semi-Recessed Adjustable 40 lx LED 2700K Medium DE


Black Structure

Nyto Semi-Recessed web page or ask for a quote.

TM30 & CRI diagram




Light distribution & beam diagram

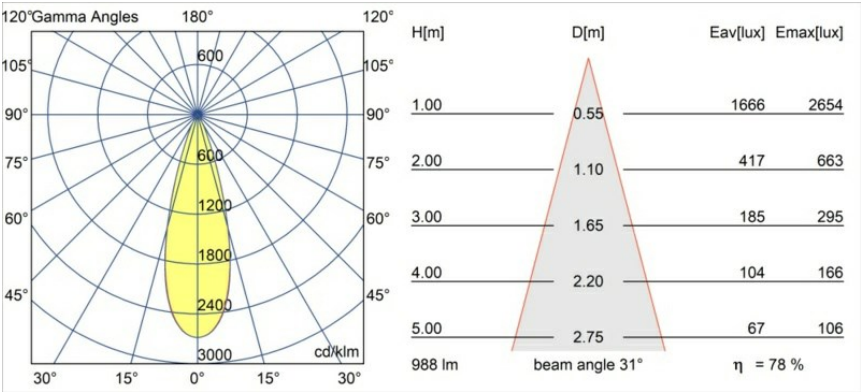


Diagrams

Installation Accessories



12293130 Plaster Kit 100x120-40 1x



10889530 Installation Housing 123x100x80

Choose a required accessory