


Date
Customer
Project
Type

*Nyto Semi-Recessed Adjustable 40 1x LED 2700K Flood DE Black Structure*



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.

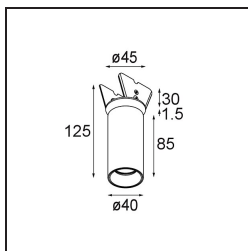

**Specifications**

Material	13835232
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	98 100 100 100 79
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	45.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Semi-Recessed
Cut-out size (mm)	ø40
Mounting depth (mm)	110.0
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	223.0
Drive current (mA)	350      500
Min. forward voltage (Vf)	15,4      15,8
Max. forward voltage (Vf)	18,8      19,4
Connected load (W)	6,0      8,8
Luminous flux per lamp (lm)	579      783
Efficacy (lm/W)	97      89
Glare rating	19      20

---


Remark

- This product comes in different Direct Custom options. Discover them all on the Modest Recessed web page or ask for a quote.
-

**TM30 & CRI diagram**




**Light distribution & beam diagram**

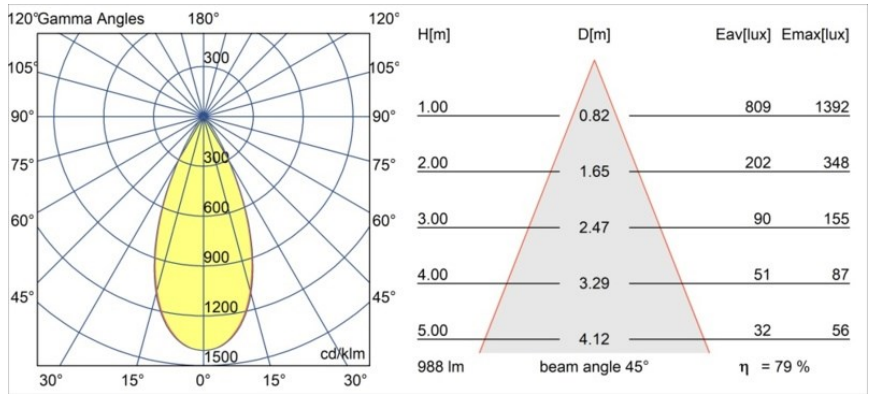


Diagrams

**Optical Accessories**

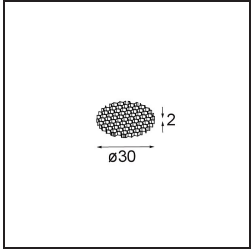


**10223032** Honeycomb 28 Black

**Installation Accessories**

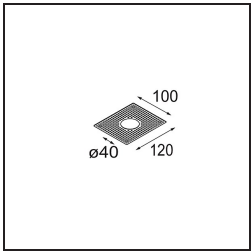

**12293130** Plaster Kit 100x120-40 1x

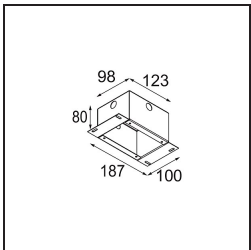

**10889530** Installation Housing 123x100x80

Choose a required accessory